

**MCCRAY**  
**REFRIGERATORS**  
*for*  
**COMMERCIAL USE**

THIRTY-SECOND EDITION

**MCCRAY REFRIGERATOR**  
**SALES CORPORATION**

5205 EUCLID AVENUE  
CLEVELAND, OHIO


TELEPHONE HENDERS 1420



# Coolers and Refrigerators

For Grocery Stores, Markets, Hotels, Restaurants,  
Hospitals, Institutions, Colleges, Clubs and Florists

32ND EDITION

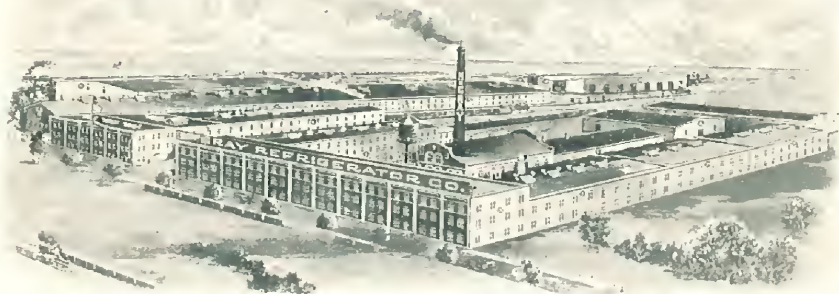

Home of the McCray

## The McCray Guarantee

*WE GUARANTEE every McCray Cooler and Refrigerator to be exactly as represented in our catalog. If one of our refrigerators or coolers is found not to be as represented, we will gladly refund purchase price and stand all freight charges.*

McCray Refrigerator Sales Corp.

*E. E. McCray*

President

McCray Refrigerator Sales Corporation

*Manufacturers of Refrigerators and  
Cooling Rooms for All Purposes*

MAIN OFFICE AND FACTORY—KENDALLVILLE, INDIANA

*Salesrooms in All Large Cities  
See Telephone Directory*

COPYRIGHT 1931 BY MC CRAY REFRIGERATOR SALES CORP.

## Efficient Refrigerator Service Is a Vital Necessity

**T**O PROTECT health—to prevent spoilage—to save food—efficient refrigerator service is a vital necessity.

It is vital in grocery stores, meat markets and delicatessen shops for most of the stock in trade of these stores require efficient refrigeration, or the profit will be wiped out through spoilage losses.

It is vital in hotels, restaurants, cafes, cafeterias and lunch-rooms for appetizing meals are the basis of success and efficient refrigerator service is a necessity to keep food pure, wholesome and palatable.


It is vital in hospitals and institutions for wherever perishable foods must be handled in large quantities the matter of efficient refrigerator service is a vital concern both to the patient and to the management.

It is vital in florist shops where the delicate beauties of flowers constitute the sole stock in trade of the merchant. Adequate and efficient refrigerator facilities are of first importance.

All perishable foods require efficient refrigeration both for health and palatability. Unless they are kept at the proper temperature the rapid multiplication of bacteria causes spoilage, destroys palatability and endangers health.

McCray refrigerators render that efficient refrigerator service.

## McCray Wall Construction

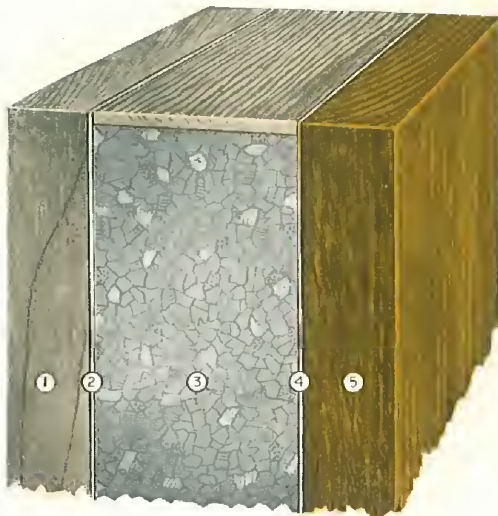

**T**HIS photograph of a section of a wall of a McCray Grocery Refrigerator is reproduced in one-half actual size. This shows better than any description the thickness and solidity of the walls of McCray Grocery Refrigerators.

1. Inside lining,  $\frac{13}{16}$ -inch odorless wood shellacked.
2. Insulating sheathing.
3. Two inches of pure corkboard sealed with Hydrolene cement.
4. Insulating sheathing.
5. Exterior case,  $\frac{13}{16}$ -inch oak.

Note that the insulating material is pure corkboard, which is sealed at all joints with hydrolene cement. This sealing is of the utmost importance. The hydrolene cement is poured hot and when cooled makes an absolutely air-tight insulation. This method of sealing the cork insulation is one of the distinctive features of the McCray.

Remember that the superior construction of the McCray means, in addition to efficiency, enduring service over a long period of years.

## Construction of McCray Grocery Refrigerators

THE exterior of McCray grocery refrigerators illustrated in this catalog is of selected oak thoroughly cured in our own dry-kilns. While a highly polished exterior is no indication of a sanitary and efficient interior, yet in the finish of all McCray refrigerators the same high standard of workmanship is maintained. They are sanded perfectly smooth and finished with special water-resisting varnish—a four coat process.

The interior lining in McCray grocery refrigerators is of five-ply laminated odorless wood, unless otherwise specified, thoroughly treated with special shellac. This makes a strictly sanitary and durable lining which is always dry owing to the McCray Patented system of dry air circulation. The floors are covered with heavy rust-resisting galvanized iron.

The walls of McCray grocery refrigerators are approximately four inches thick, thoroughly insulated with two inches of pure corkboard, sealed with hydrolene cement. This sealing is of the utmost importance. The hydrolene cement is poured hot and when cooled makes an absolutely air-tight insulation.


All hinges and fasteners are nickel-plated bronze polished, of our own special design and weight which assures perfect fitting doors. The shelves are substantially constructed of odorless wood shellacked and are easy to remove for cleaning. All doors, unless otherwise specified, are fitted with air-tight cushion gaskets.

All McCray Refrigerators and coolers are supplied with a sanitary drain pipe and water sealed trap. This is most important as it saves ice and prevents odors from entering the refrigerator through the drain pipe. The drain pipe is easily removed for cleaning. It should never be connected direct with the sewer but the connection should be broken immediately beneath the refrigerator or under the floor of the room.

All models shown in this catalog except models 2188 and 3175 are carried in stock ready for immediate shipment.

DIMENSIONS of all refrigerators shown on the following pages are over all and include molding, except the coolers shown on pages 18 to 26 and on pages 57 to 59 inclusive.



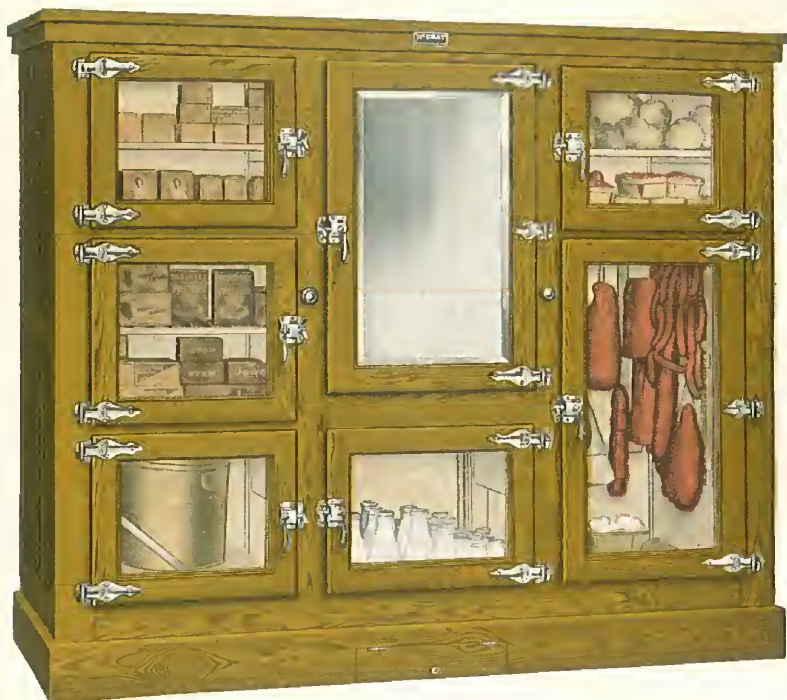

## McCray Model 411

**E**XTERIOR selected oak, finished in light oak. Interior five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick insulated with 2 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. Bevel plate mirror in ice chamber door. Six odorless wood shelves shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. Lower compartment at right equipped with meat racks and hooks. Lower left-hand compartment equipped with lard swing. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
7' 3 1/4"	2' 8 1/2"	6' 4"	490 lbs.	34.9	67.54	1500 lbs.	Gleam
Compartment		Width	Depth	Height	Door Opening		
*Cooling chamber		27 1/4 in.	23 3/8 in.	38 in.	22 1/4 x 35 1/4 in.		
Upper right-hand		23 3/8 in.	23 3/8 in.	20 in.	20 1/4 x 16 1/4 in.		
Lower right-hand		23 3/8 in.	23 3/8 in.	42 1/2 in.	20 1/4 x 38 1/4 in.		
Under cooling chamber		27 1/4 in.	23 3/8 in.	19 in.	22 1/4 x 16 1/4 in.		
Upper left-hand		23 3/8 in.	23 3/8 in.	20 in.	20 1/4 x 16 1/4 in.		
Center left-hand		23 3/8 in.	23 3/8 in.	22 1/2 in.	20 1/4 x 18 1/4 in.		
Lower left-hand		23 3/8 in.	23 3/8 in.	20 in.	20 1/4 x 16 1/4 in.		

\*Ice racks omitted.



## McGray Model 410

**E**XTERIOR of selected oak, finished in light oak. Interior five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick insulated with 2 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. Bevel plate mirror in ice chamber door. Eight odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. Lower compartment at right equipped with lard swing. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
7' 3 1/2"	2' 8 1/2"	6' 4"	490 lbs.	43.6	67.54	1500 lbs.	<i>Gazelle</i>
Compartment			Width	Depth	Height	Door Opening	
*Cooling chamber			27 1/4 in.	23 7/8 in.	38 in.	22 1/4 x 35 1/4 in.	
Upper right-hand			23 3/8 in.	23 7/8 in.	20 in.	20 1/4 x 16 1/4 in.	
Center right-hand			23 3/8 in.	23 7/8 in.	22 1/2 in.	20 1/4 x 18 1/4 in.	
Lower right-hand			23 3/8 in.	23 7/8 in.	20 in.	20 1/4 x 16 1/4 in.	
Under cooling chamber			27 1/4 in.	23 7/8 in.	19 in.	22 1/4 x 16 1/4 in.	
Upper left-hand			23 3/8 in.	23 7/8 in.	20 in.	20 1/4 x 16 1/4 in.	
Center left-hand			23 3/8 in.	23 7/8 in.	22 1/2 in.	20 1/4 x 18 1/4 in.	
Lower left-hand			23 3/8 in.	23 7/8 in.	20 in.	20 1/4 x 16 1/4 in.	

\*Ice racks omitted.





## McCray Model 405

**E**XTERIOR of selected oak, finished in light oak. Interior five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. Bevel plate mirror in ice chamber door. Five odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. Lower compartment at right equipped with lard swing. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 5 <sup>3</sup> / <sub>4</sub> "	2' 8 <sup>1</sup> / <sub>2</sub> "	6' 4"	350 lbs.	21.62	38.0	1000 lbs.	Game
Compartment	Width	Depth	Height	Door Opening			
*Cooling chamber	18 <sup>1</sup> / <sub>2</sub> in.	23 <sup>7</sup> / <sub>8</sub> in.	38 in.	15 <sup>1</sup> / <sub>4</sub> x 35 <sup>1</sup> / <sub>4</sub> in.			
Upper right-hand	23 <sup>3</sup> / <sub>8</sub> in.	23 <sup>7</sup> / <sub>8</sub> in.	20 in.	20 <sup>1</sup> / <sub>4</sub> x 16 <sup>1</sup> / <sub>4</sub> in.			
Center right-hand	23 <sup>3</sup> / <sub>8</sub> in.	23 <sup>7</sup> / <sub>8</sub> in.	22 <sup>1</sup> / <sub>2</sub> in.	20 <sup>1</sup> / <sub>4</sub> x 18 <sup>1</sup> / <sub>4</sub> in.			
Under cooling chamber	18 <sup>1</sup> / <sub>2</sub> in.	23 <sup>7</sup> / <sub>8</sub> in.	19 in.	15 <sup>1</sup> / <sub>4</sub> x 16 <sup>1</sup> / <sub>4</sub> in.			
Lower right-hand	20 <sup>3</sup> / <sub>8</sub> in.	23 <sup>7</sup> / <sub>8</sub> in.	20 in.	20 <sup>1</sup> / <sub>4</sub> x 16 <sup>1</sup> / <sub>4</sub> in.			

\*Ice racks omitted.



## McCray Model 720

**E**XTERIOR of selected oak, finished in light oak. Interior five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass, bevel plate mirror in ice chamber door. Eleven odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. This model may be cooled by mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
6' 1/2"	2' 5 1/4"	6'	340 lbs.	32.75	42.2	1175 lbs.	Globe
Compartment		Width	Depth	Height	Door Opening		
*Cooling chamber		23 1/2 in.	20 3/8 in.	37 in.	19 1/4 x 34 1/4 in.		
Upper right-hand		17 3/4 in.	20 3/8 in.	25 in.	15 1/4 x 21 1/4 in.		
Lower right-hand		17 3/4 in.	20 3/8 in.	34 1/2 in.	15 1/4 x 30 1/4 in.		
Under cooling chamber		23 1/2 in.	20 3/8 in.	17 in.	19 1/4 x 14 1/4 in.		
Upper left-hand		17 3/4 in.	20 3/8 in.	25 in.	15 1/4 x 21 1/4 in.		
Lower left-hand		17 3/4 in.	20 3/8 in.	34 1/2 in.	15 1/4 x 30 1/4 in.		

\*Ice racks omitted.




## McCray Model 406

**E**XTERIOR of selected oak, finished in light oak. Interior five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard, sealed with hydrolene. Display doors have three thicknesses of double strength glass. Bevel plate mirror in ice chamber door. Six odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. This model is mounted on piano casters. May be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 6 $\frac{3}{4}$ "	2' 6 $\frac{1}{4}$ "	5' 6"	250 lbs.	25.25	30.0	925 lbs.	Gene

Compartment	Width	Depth	Height	Door Opening
*Cooling chamber	21 $\frac{3}{8}$ in.	21 $\frac{3}{8}$ in.	30 in.	18 $\frac{1}{4}$ x 27 $\frac{1}{4}$ in.
Upper right-hand	21 $\frac{1}{8}$ in.	21 $\frac{1}{8}$ in.	26 $\frac{3}{4}$ in.	18 $\frac{1}{4}$ x 22 $\frac{1}{4}$ in.
Lower right-hand	21 $\frac{1}{8}$ in.	21 $\frac{1}{8}$ in.	26 $\frac{3}{4}$ in.	18 $\frac{1}{4}$ x 22 $\frac{1}{4}$ in.
Under cooling chamber	21 $\frac{3}{4}$ in.	21 $\frac{3}{8}$ in.	19 in.	18 $\frac{1}{4}$ x 16 $\frac{1}{4}$ in.

\*Ice racks omitted.

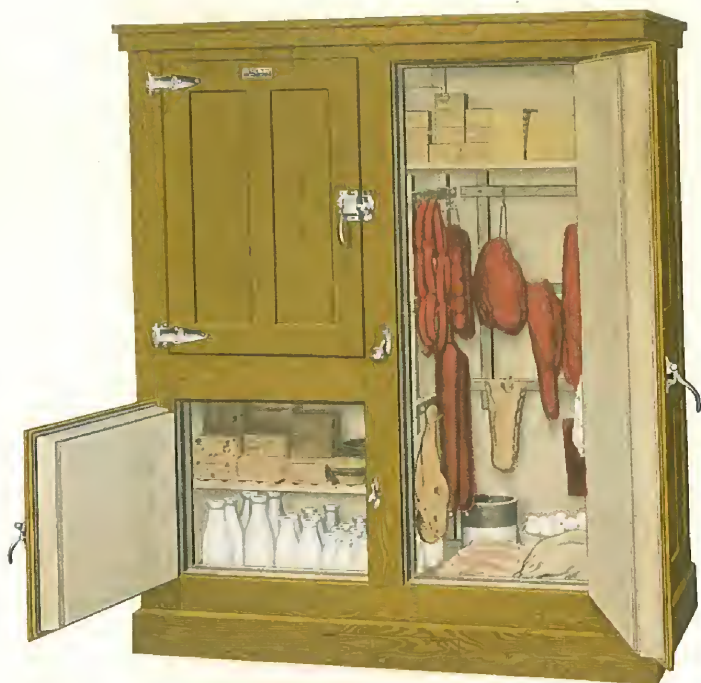

## McCray Model 96

**E**XTERIOR of selected oak, finished in light oak. Interior five-ply laminated odorless wood, shellacked. Floor is covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Two odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. Compartment at right equipped with meat rails and hooks. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
5' 4 $\frac{1}{2}$ "	2' 11 $\frac{1}{4}$ "	6' 6"	500 lbs.	19.5	55.11	1235 lbs.	<i>Mansion</i>
Compartment		Width	Depth	Height	Door Opening		
*Cooling chamber		26 $\frac{5}{8}$ in.	26 $\frac{5}{8}$ in.	36 in.	22 $\frac{1}{4}$ x 33 $\frac{1}{4}$ in.		
Right-hand		26 $\frac{1}{8}$ in.	26 $\frac{5}{8}$ in.	65 $\frac{5}{8}$ in.	22 $\frac{1}{4}$ x 61 $\frac{1}{4}$ in.		
Under cooling chamber		26 $\frac{5}{8}$ in.	26 $\frac{5}{8}$ in.	23 in.	22 $\frac{1}{4}$ x 20 $\frac{1}{4}$ in.		

\*Ice racks omitted.





## McCray Model 496

**E**XTERIOR of selected oak, finished in light oak. Interior five-ply laminated odorless wood, shellacked. Floor is covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Four odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit. This refrigerator is especially designed for the average size bakery. This model is also available with glass in the storage doors and bevel plate mirror in the ice door.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
5' 4"	2' 11"	6' 6"	550 lbs.	28.9	55.11	1235 lbs.	<i>Wisdom</i>

Compartment	Width	Depth	Height	Door Opening
*Cooling chamber	26 $\frac{5}{8}$ in.	26 $\frac{5}{8}$ in.	36 $\frac{1}{2}$ in.	22 $\frac{3}{8}$ x 33 $\frac{1}{4}$ in.
Upper right-hand	26 $\frac{1}{8}$ in.	26 $\frac{5}{8}$ in.	32 in.	22 $\frac{3}{8}$ x 28 $\frac{3}{8}$ in.
Lower right-hand	26 $\frac{1}{8}$ in.	26 $\frac{5}{8}$ in.	33 $\frac{3}{8}$ in.	22 $\frac{3}{8}$ x 28 $\frac{3}{8}$ in.
Under cooling chamber	26 $\frac{5}{8}$ in.	26 $\frac{5}{8}$ in.	23 in.	22 $\frac{3}{8}$ x 20 $\frac{3}{8}$ in.

\*Ice racks omitted.





## McCray Model 409

**T**HIS model is especially designed for self-service and chain store. It is slightly different in construction than the other models illustrated in this section, as the doors are not fitted with gaskets and the interior lining is not of laminated, but of solid odorless wood. Interior solid odorless wood, shellacked. Exterior of selected oak, finished in light oak. Floor is covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. Three odorless wood shelves in center compartment, six metal bar shelves in upper compartment in front of cooling chamber. Center compartment at left has solid partition separating same from other compartments. This compartment is for cheese and equipped with cheese slide. Compartment at right in center is equipped with slides for a tub of lard or butter. Nickel-plated bronze hardware, polished, fasteners of the self-closing type. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
7' 1/2"	2' 7 1/4"	7'	485 lbs.	28.7	70.2	1600 lbs.	Grant
Compartment	Width	Depth	Height			Door Opening	
Cooling chamber	74 in.	12 3/8 in.	23 3/4 in.			11 3/4 x 22 3/4 in.	
Upper left-hand	24 in.	6 3/4 in.	25 in.			20 3/8 x 22 3/8 in.	
Upper center	24 in.	6 3/4 in.	25 in.			20 3/8 x 22 3/8 in.	
Upper right-hand	24 in.	6 3/4 in.	25 in.			20 3/8 x 22 3/8 in.	
Left center	24 in.	22 3/4 in.	25 in.			20 3/8 x 22 3/8 in.	
Center	24 in.	22 3/4 in.	25 in.			20 3/8 x 22 3/8 in.	
Right center	24 in.	22 3/4 in.	25 in.			20 3/8 x 22 3/8 in.	
Lower left-hand	24 in.	22 3/4 in.	20 1/2 in.			20 3/8 x 16 7/8 in.	
Lower center	24 in.	22 3/4 in.	20 1/2 in.			20 3/8 x 16 7/8 in.	
Lower right-hand	24 in.	22 3/4 in.	20 1/2 in.			20 3/8 x 16 7/8 in.	



## McCray Model 422

*This model is built for machine refrigeration only and the coil chamber is overhead.*

**E**XTERIOR of selected oak, finished in light oak. Interior solid odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. Twelve odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. Lower left-hand compartment equipped with lard swing. This model may be cooled by any type of refrigeration.

Width	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word Gear
6' 11 1/2"	2' 6 3/4"	7'	57.8	70.33	1530 lbs.	
Compartment	Width	Depth	Height	Door Opening		
Cooling chamber	74 in.	18 1/2 in.	9 in.	72 3/8 x 7 in.		
Upper left-hand	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		
Upper center	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		
Upper right-hand	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		
Center left-hand	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		
Center	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		
Center right-hand	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		
Lower left-hand	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		
Lower center	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		
Lower right-hand	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		



## McCray Model 423

*This model is built for machine refrigeration only and the coil chamber is overhead.*

**E**XTERIOR of selected oak, finished in light oak. Interior of solid odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. Eight odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. Lower left-hand compartment equipped with lard swing. This model may be cooled by any type of mechanical refrigeration.

Width	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 9 1/2"	2' 6 3/4"	7'	37.5	45.62	1135 lbs.	<i>Glide</i>
Compartment	Width	Depth	Height	Door Opening		
Cooling chamber	48 1/2 in.	18 1/2 in.	9 in.	46 3/8 x 7 in.		
Upper left-hand	24 in.	22 1/8 in.	20 in.	20 3/8 x 16 3/8 in.		
Upper right-hand	24 in.	22 1/8 in.	20 in.	20 3/8 x 16 3/8 in.		
Center left-hand	24 in.	22 1/8 in.	20 in.	20 3/8 x 16 3/8 in.		
Center right-hand	24 in.	22 1/8 in.	20 in.	20 3/8 x 16 3/8 in.		
Lower left-hand	24 in.	22 1/8 in.	20 in.	20 3/8 x 16 3/8 in.		
Lower right-hand	24 in.	22 1/2 in.	20 in.	20 3/8 x 16 3/8 in.		



## Construction of McCray Market Coolers

THE exterior of McCray stock size coolers is of selected oak thoroughly cured in our own kilns. Built-to-order coolers may be constructed of any other material and finished to match the surrounding woodwork.

The interior of all McCray coolers is of odorless wood, thoroughly air and kiln cured and finished with special shellac. This makes a durable and sanitary lining that is always dry owing to the McCray system of dry air circulation.

The walls of McCray coolers are approximately five inches thick. (See illustration on page 16.) The materials entering into their construction are kiln cured lumber, special insulating sheathing and three inches of pure corkboard sealed with hydrolene cement.

All hinges and fasteners are nickel-plated bronze. The hardware used on the display and service doors is polished and ball-burnished on the entrance and ice doors. This hardware is of our own special design and weight.

While a highly polished exterior is no indication of a sanitary and efficient interior, yet in the finish of all McCray coolers the same high standard of workmanship is maintained. They are carefully and accurately fitted, sanded perfectly smooth and finished with special water-resisting varnish—a four coat process.


When a cooler is described as “right-hand” the meaning is that it is built to stand on the right side of the room as you enter from the street, only the front and the left-hand side being finished. Likewise, “left-hand” means that the cooler is built for the left-hand side of the room as you enter from the street, only the front and right-hand side being finished. The side containing the window or windows is always designated as the front.

By a “single” cooler is meant one having one cooling room and one ice chamber. A “double” cooler is so named when there are two compartments, whether both rooms are cooled by one or two ice chambers.

All coolers shown in this catalog (except when otherwise specified) are fitted with the usual meat rails and racks complete with heavily tinned meat hooks.

All McCray Refrigerators and Coolers, too large to be shipped “Set Up” are completely assembled and erected in our factory before they are knocked down and crated for shipment, each section is carefully numbered and marked before being knocked down. This eliminates any possibility of their not fitting properly and adds greatly to the ease of re-assembling at destination. We know that each section will fit because it has been set up in our plant before shipment.

DIMENSIONS of all coolers shown in this catalog are body measurements and do not include moldings.

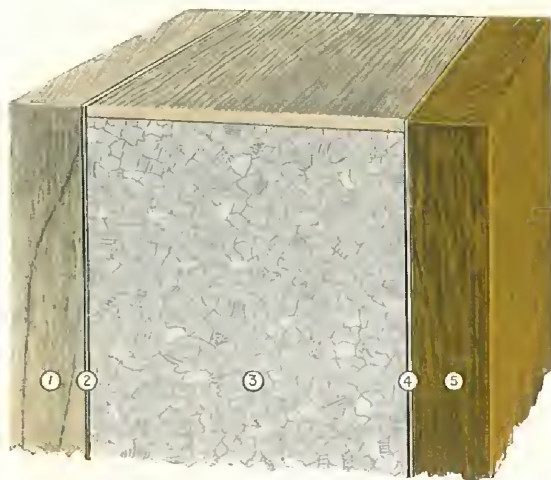


### One-Half Actual Size of McCray 5-Inch Wall

**T**HIS illustrates the 5-inch wall of a McCray Cooler—reproduced one-half actual size. It shows better than any description the thickness and solidity of our walls, which consist of two layers of  $\frac{13}{16}$ -inch lumber, two layers of insulating sheathing and 3 inches of pure corkboard.

1. Inside lining,  $\frac{13}{16}$ -inch wood.
2. Insulating sheathing.
3. Three inches of pure corkboard sealed with Hydrolene Cement.
4. Insulating sheathing.
5. Exterior case,  $\frac{13}{16}$ -inch oak.


Note that the insulating material used in McCray refrigerators is pure corkboard, which is sealed at all joints with hydrolene cement. This sealing is of the utmost importance. The hydrolene cement is poured hot and when cooled makes an absolutely air-tight insulation. This method of sealing the cork insulation is one of the distinctive features of the McCray. Remember that the superior construction of the McCray means, in addition to efficiency, enduring service over a long period of years.



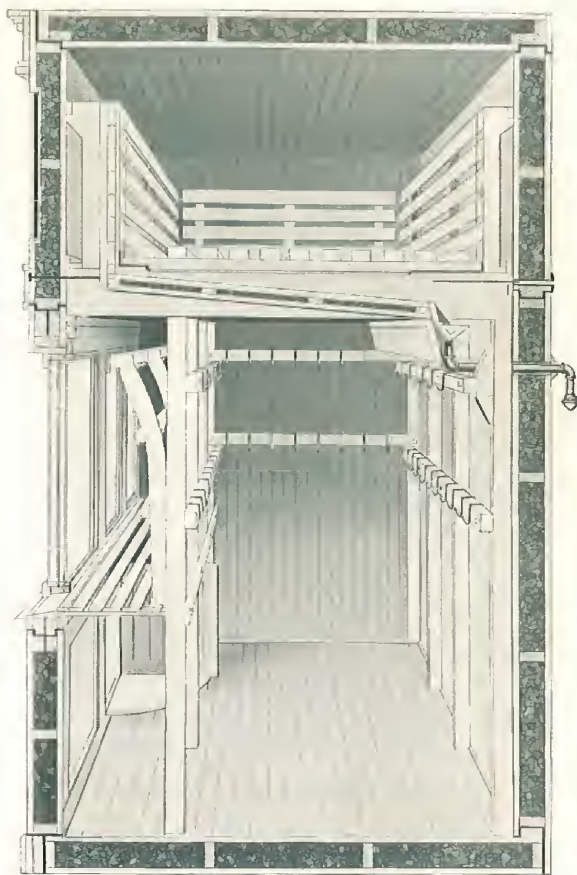

### McCray Stock Size Cooler With End Removed


**I**N THIS picture you are looking into the heart of the McCray Cooler. Of course, the picture can give only a faint idea of the staunch construction. Notice the pure corkboard insulation all around. The finest materials and the most painstaking craftsmanship go into every detail of the McCray. That's why it costs less to operate a McCray whether you use ice or machine.

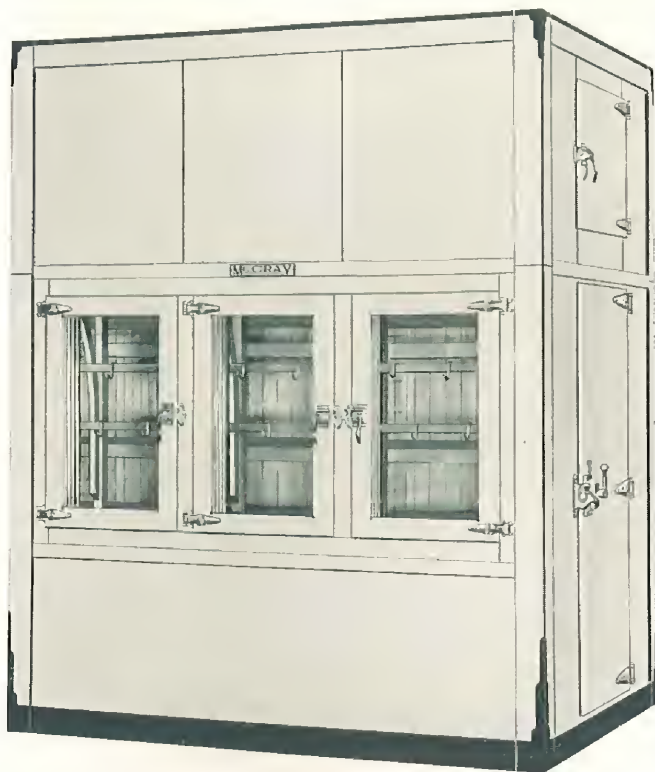

## McCray Model P-151

**E**XTERIOR, front and one side is of porcelain, with black porcelain base and trim. The display doors are also of porcelain. Interior is of odorless wood, shellacked, floor is of hardwood. The walls are approximately 5 inches thick, insulated with 3 inches of pure cork-board sealed with hydrolene. The display doors have three thicknesses of double strength glass. Interior is equipped with meat rails and hooks. Nickel-plated bronze hardware, polished. All doors are fitted with double gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. Carried in stock only in the size specified, in both right and left-hand styles.

Width 8'	Depth 6'	Height 10'	Ice Capacity 2200 lbs.	Cu. Ft. Capacity 339.42	Shipping Weight 4700 lbs.	Code Word <i>Moss</i>
Inside Size of Ice Chamber with Ice Racks in Place 83½" wide, 41" deep, 29" high					Cooling Chamber Door 26½" wide, 22½" high	

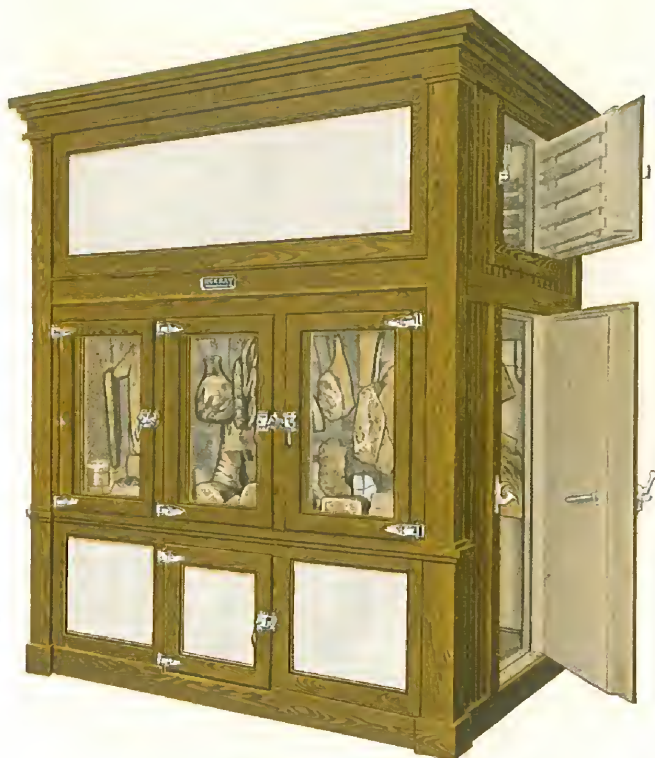

## McCray Model 185

**E**XTERIOR, front and one end of selected oak, finished in light oak. Interior is of odorless wood, shellacked. Floor is of hardwood. The walls are approximately 5 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. The panels above and below the retail windows are of white porcelain. The display doors have three thicknesses of double strength glass. The small door below the retail windows is equipped with a lard swing. All doors are fitted with double gaskets. The interior is equipped with meat rails and hooks. Nickel-plated bronze hardware, polished on the display and service doors, and ball-burnished on the entrance and ice doors. These models may be cooled by either ice or mechanical refrigeration of any type, no changes are necessary. Carried in stock in both right and left-hand styles. Built in three sizes; see specifications below.

No.	Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
185	8'	6'	10'	2200 lbs.	339.42	5775 lbs.	<i>Mild</i>
182	8'	8'	10'	3200 lbs.	470.81	6050 lbs.	<i>Merchant</i>
181	10'	8'	10'	4200 lbs.	602.20	7050 lbs.	<i>Modern</i>

*Inside size of ice chamber with ice racks in place*

No. 185.....	81½ in. wide, 41 in. deep, 29 in. high.
No. 182.....	83½ in. wide, 63 in. deep, 28 in. high.
No. 181.....	107½ in. wide, 63 in. deep, 28 in. high.



## McCray Model 160

**E**XTERIOR, front and one end, of selected oak, finished in light oak. Interior of odorless wood, shellacked. Floor is of hardwood. Walls are approximately 5 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. The panels above and below the retail windows are of white porcelain. Display doors have three thicknesses of double strength glass. Nickel-plated bronze hardware, polished on the display doors, and ball-burnished on the entrance and ice doors. There is a bevel plate mirror between the two display doors. The interior is equipped with meat rails and hooks. All doors are fitted with double gaskets. These models may be cooled by either ice or mechanical refrigeration of any type, no changes are necessary. Carried in stock in both right and left-hand styles. Built in three sizes; see specifications below.

No.	Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
160	8'	6'	10'	2200 lbs.	339.42	4950 lbs.	Mary
161	7'	5'	9' 10"	1400 lbs.	231.25	4025 lbs.	Mars
162	6'	5'	9' 10"	1100 lbs.	193.75	3700 lbs.	Mascot

*Inside size of ice chamber with ice racks in place*

No. 160	83 in. wide, 41 in. deep, 29 in. high.
No. 161	71½ in. wide, 31 in. deep, 27½ in. high.
No. 162	59½ in. wide, 31 in. deep, 27½ in. high.



## McCray Model 190

*This model is built for machine refrigeration only. Cooling chamber is overhead.*

**E**XTERIOR, front and one end, of selected oak, finished in light oak. Interior of odorless wood, shellacked. Floor is of hardwood. Walls are approximately 5 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. All doors fitted with double gaskets. Nickel-plated bronze hardware, polished on display doors, and ball-burnished on entrance and cooling chamber doors. There is a bevel plate mirror between the two display doors. The interior is equipped with meat rails and hooks. Any type of cooling unit may be installed in the cooling chamber. This model is carried in stock in both right and left-hand styles.

Width	Depth	Height	Cu. Ft. Capacity	Shipping Weight	Code Word
8'	6'	9' 4"	314.73	4350 lbs.	<i>Mutual</i>

*Inside size of coil space.*  
86 in. wide, 42¾ in. deep, 24¾ in. high

*Cooling Chamber Door.*  
26½ in. wide, 22½ in. high





## McCray Model 165

**E**XTERIOR, front and one end, of selected oak, finished in light oak. The white panels in the front are of Opal glass. The interior is of odorless wood, shellacked. The floor is of hardwood. Walls are approximately 5 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. The interior is equipped with two tiers of heavy meat rails, fitted with meat hooks. Nickel-plated bronze hardware, ball-burnished. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. Carried in stock in both right and left-hand styles. All doors fitted with double gaskets.


Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
6'	8'	9' 10"	2200 lbs.	333.25	4775 lbs.	<i>Medal</i>

*Inside size of ice chamber with ice racks in place.*

59½ in. wide, 63 in. deep, 26½ in. high.

*Cooling Chamber Door.*

26½ in. wide, 22½ in. high

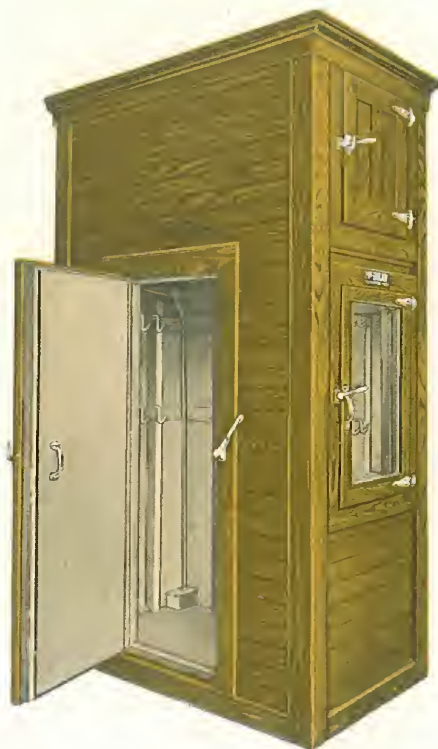

## McCray Model 459

**E**XTERIOR, front and one end, are of selected oak, finished in light oak. Interior is of odorless wood, shellacked. Floor is of hardwood. Walls are approximately 5 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. The retail window in the front has three thicknesses of double strength glass. Interior is equipped with meat rails and hooks, there is a slatted shelf of ready access to the retail window. Nickel-plated bronze hardware, polished on the display and ice doors, and ball-burnished on the entrance door. All doors are fitted with double gaskets. This model may be cooled by either ice or mechanical refrigeration of any type, no changes necessary. Carried in stock only as shown in illustration.

Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
4'	5'	9'	600 lbs.	107.7	2550 lbs.	<i>Morgan</i>

*Inside size of ice chamber with ice racks in place.*  
22¼ in. wide, 47 in. deep, 24½ in. high.

*Cooling Chamber Door.*  
19½ in. wide, 21 in. high.



## McCray Model 57

**E**XTERIOR, front and right-hand side, of selected oak, finished in light oak. Interior is of odorless wood, shellacked. Floor is of hardwood. There are white porcelain panels at the side and below retail window. The walls are approximately 5 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. The interior is equipped with meat rails and hooks. The display door has three thicknesses of double strength glass. Nickel-plated bronze hardware polished on the display door, and ball-burnished on the entrance and ice doors. All doors fitted with double gaskets. This model may be cooled by either ice or mechanical refrigeration of any type, no changes necessary. Carried in stock in both right and left-hand styles.

Width 5'	Depth 7'	Height 7' 3"	Ice Capacity 1350 lbs.	Cu. Ft. Capacity 160.4	Shipping Weight 2875 lbs.	Code Word <i>Motar</i>
-------------	-------------	-----------------	------------------------------	------------------------------	---------------------------------	------------------------------

### *Inside size of ice chamber.*

48 in. wide, 21½ in. deep, 51½ in. high.

### *Cooling Chamber Door.*

16½ in. wide, 35¾ in. high.



## McCray Model 172

**E**XTERIOR, front and one end, are of selected oak, finished in light oak. Interior is lined with odorless wood, shellacked. Floor is of hardwood. The walls are approximately 5 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. All doors fitted with double gaskets. Interior equipped with meat rails and hooks. Nickel-plated bronze hardware, polished on the display and service doors and ball-burnished on the entrance and ice doors. This model may be cooled by either ice or mechanical refrigeration of any type, no changes necessary. Carried in stock in both right and left-hand styles.

Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
6'	5'	9'	1200 lbs.	175.11	3150 lbs.	Major

*Inside size of ice chamber with ice racks in place.*

60 in. wide, 31½ in. deep, 24 in. high.

*Cooling Chamber Door.*

24¾ in. wide, 21½ in. high.




## McCray Model 564

**E**XTERIOR of selected oak, finished in light oak. Interior five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Display doors have three thicknesses of double strength glass. Three odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished, fasteners of self-closing type. Panel above retail window is of white porcelain. All doors fitted with gaskets. Compartment at right equipped with meat rails and hooks. Cooling chamber is overhead. There are two distinct compartments. This model may be cooled by ice or mechanical refrigeration of any type no changes necessary.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
5'	3' 6"	8'	650 lbs.	29.5	90.91	2075 lbs.	Music
Compartment			Width	Depth	Height	Door Opening	
*Cooling chamber			52 in.	21 $\frac{5}{8}$ in.	24 $\frac{5}{8}$ in.	21 $\frac{3}{4}$ x 22 $\frac{1}{2}$ in.	
Right-hand			25 $\frac{3}{8}$ in.	34 in.	56 $\frac{3}{8}$ in.	21 $\frac{3}{4}$ x 54 in.	
Upper left-hand			25 $\frac{3}{8}$ in.	34 in.	28 $\frac{3}{8}$ in.	21 $\frac{3}{4}$ x 25 $\frac{1}{8}$ in.	
Lower left-hand			25 $\frac{3}{8}$ in.	34 in.	28 $\frac{3}{8}$ in.	21 $\frac{3}{4}$ x 25 $\frac{1}{8}$ in.	

\*Ice racks omitted.



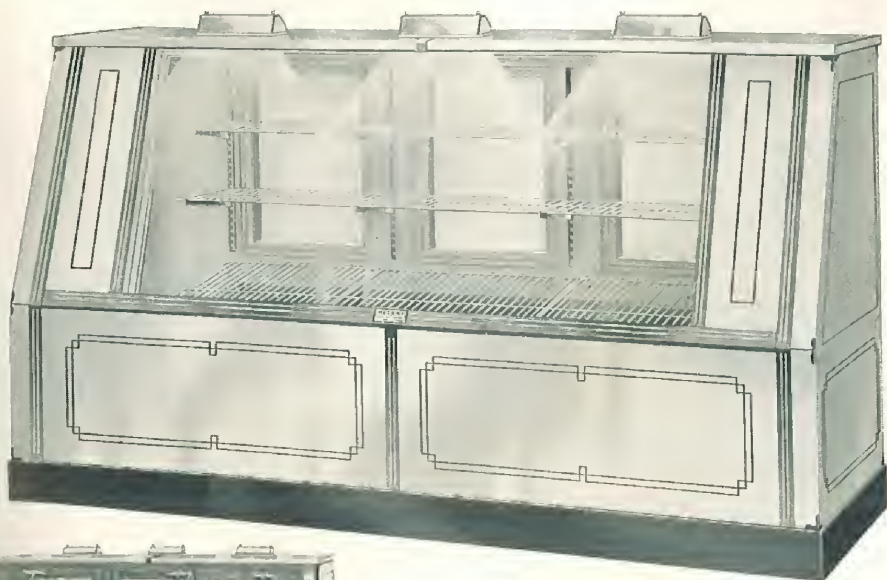


## McCray Model 8

*This model is built for machine refrigeration only.*

**E**XTERIOR, front, top and ends, covered with white porcelain trimmed in black. Interior is of heavy rust-resisting metal covered with special white refrigerator enamel. Walls are approximately 4 inches thick, insulated with 2 inches of corkboard sealed with hydrolene. Floor is approximately 5 inches thick, insulated with 3 inches of corkboard. Front has three thicknesses of plate glass. There is a coil space in each end. Entire case is cooled by the same coils. Illuminated by three concealed exterior lights. The rear of this model is of selected oak, finished in light oak. Nickel-plated bronze hardware, polished. Drain is through the rear. There are studs in the coil chamber for hanging of cooling units. There are three service doors leading into the display compartment and two leading into the storage compartment. Fasteners of self-closing type. Doors fitted with gaskets. This model may be cooled by any type of machine refrigeration.

Width 8'	Depth 2' 7"	Height 4' 6"	Sq. Ft. Shelf Space 35.	Cu. Ft. Capacity 48.	Shipping Weight 1475 lbs.	Code Word <i>Dummy</i>
Compartment		Width	Depth	Height	Door Opening	
Cooling chamber		8 $\frac{3}{8}$ in.	13 $\frac{3}{4}$ in. Top 23 $\frac{3}{8}$ in. Bottom	46 $\frac{3}{4}$ in.	18 $\frac{3}{8}$ x 23 $\frac{1}{8}$ in. Upper 22 $\frac{1}{8}$ x 16 $\frac{3}{8}$ in. Lower	
Storage compartment		70 in.	13 $\frac{3}{4}$ in. Top 23 $\frac{3}{8}$ in. Bottom	45 $\frac{3}{4}$ in.		

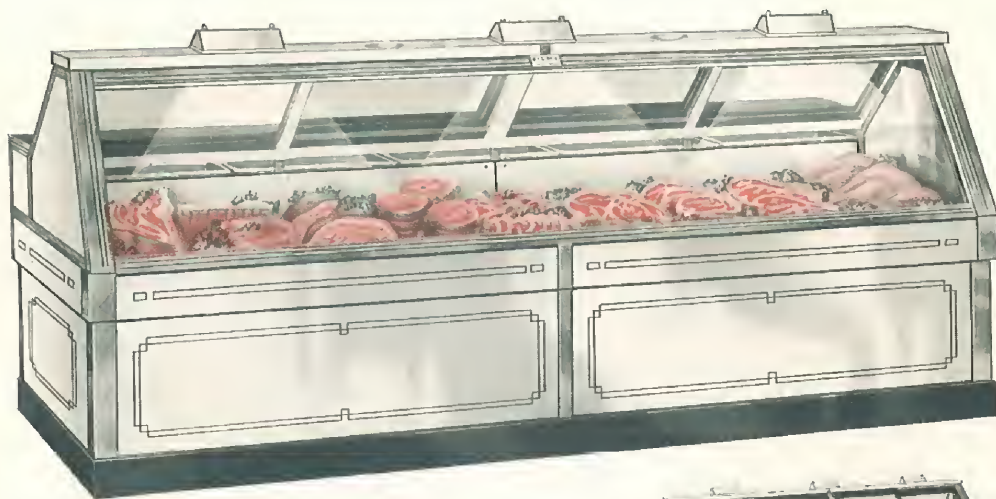

## McCray Models 67, 87, 107 and 127

**E**XTERIOR, white porcelain with black facing and base, trimmed with modeled mirror finished Monel metal. Interior, floor is of snow-white porcelain, the wood and metal parts are covered with special white refrigerator enamel. Walls are approximately 4 inches thick insulated with 2 inches of pure corkboard sealed with hydrolene. Front has two thicknesses of plate glass. The rear of this model is of selected oak, finished in light oak. The sliding doors are of special composition, finished in black and have two thicknesses of double strength glass. They operate on black porcelain guides. Wrapping counter at exactly the right height extends across the entire back with a scale-stand and paper receptacle in the center. Height from floor to wrapping counter 38 inches. These models are illuminated by concealed exterior lights. Model 67 has two lights, the 87 and 107 have three lights, and 127 has four lights. Nickel-plated bronze hardware, polished. Lift lids are fitted with gaskets. May be cooled by ice or mechanical refrigeration of any type, no changes necessary.

Model	Length	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
67	6'	3' 4"	4' 2"	11.12	18.74	960 lbs.	Donald
87	8'	3' 4"	4' 2"	15.12	24.18	1250 lbs.	Duke
107	10'	3' 4"	4' 2"	19.12	30.62	1450 lbs.	Dude
127	12'	3' 4"	4' 2"	23.12	37.07	1725 lbs.	Dora

Above models are 2' 4" high without base.

Compartment	Model	Width	Depth	Height	Door Opening
Cooling chamber	67	66 $\frac{3}{4}$ in.	8 $\frac{1}{2}$ in.	9 in.	1 lid, 66 $\frac{3}{4}$ x 8 $\frac{1}{2}$ in.
Cooling chamber	87	90 $\frac{3}{4}$ in.	8 $\frac{1}{2}$ in.	9 in.	2 lids, 36 x 8 $\frac{1}{2}$ in.
Cooling chamber	107	114 $\frac{3}{4}$ in.	8 $\frac{1}{2}$ in.	9 in.	2 lids, 48 x 8 $\frac{1}{2}$ in.
Cooling chamber	127	138 $\frac{3}{4}$ in.	8 $\frac{1}{2}$ in.	9 in.	2 lids, 60 x 8 $\frac{1}{2}$ in.





## McCray Models P-3108, P-3110 and P-3112

*These models are built for machine refrigeration only.*

**E**XTERIOR, front, top and ends, is covered with white porcelain trimmed in black. Nine-inch black porcelain base. Front and top are provided with three courses of clear plate glass. Interior is of heavy rust-resisting galvanized iron covered with special white refrigerator enamel. Walls are approximately 6 inches thick, insulated with 4 inches of pure corkboard sealed with hydrolene. Models P-3108 and P-3110 have coil space in each end. Model P-3112 has coil space in each end and center. Exterior electric lights regular equipment. Model P-3108 has two lights, Model P-3110 has three lights, and Model P-3112 has four lights. The rear of this model is of selected oak, finished in light oak. Coil space, 9¼ inches wide in each end. Model P-3112 has coil space 8¼ inches wide in center. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by any type of mechanical refrigeration.

Model	Length	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
P-3108	8'	3'	3' 8"	20.	37.09	1650 lbs.	<i>Ducat</i>
P-3110	10'	3'	3' 8"	27.5	46.37	2000 lbs.	<i>Duel</i>
P-3112	12'	3'	3' 8"	35.	55.64	2325 lbs.	<i>Dasher</i>
Compartment		Model	Width	Depth		Height	Door Opening
Cooling chamber		P-3108	9½ in.	21 in. Top	23¾ in. Bottom	33¾ in.	8½ x 31 in.
Cooling chamber		P-3110	9½ in.	21 in. Top	23¾ in. Bottom	33¾ in.	8½ x 31 in.
Cooling chamber		P-3112	9½ in.	21 in. Top	23¾ in. Bottom	33¾ in.	8½ x 31 in.
Storage compartment		P-3108	64 in.	21 in. Top	23¾ in. Bottom	33 in.	21¼ x 12¾ in.
Storage compartment		P-3110	88 in.	21 in. Top	23¾ in. Bottom	33 in.	21¼ x 12¾ in.
Storage compartment		P-3112	112 in.	21 in. Top	23¾ in. Bottom	33 in.	21¼ x 12¾ in.



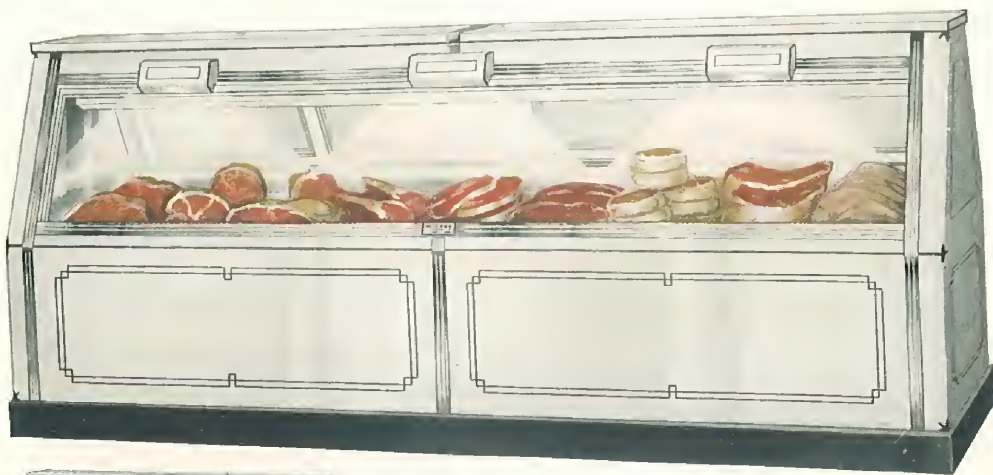


## McCray Model P-110

*This display storage refrigerator is built for machine refrigeration only.*

THERE is a coil space in the top of the display compartment and in the front of the storage compartment. This model may be cooled by any type of machine refrigeration. Exterior, front, top and ends, is covered with white porcelain trimmed in black. Five-inch black porcelain base. Interior, both display and storage compartment, is of heavy rust-resisting galvanized iron, covered with special white refrigerator enamel, except the ends and the back rail of the display compartment which are covered with Monel Metal. Walls are approximately 5 inches thick, insulated with 4 inches of pure corkboard sealed with hydrolene. The front has three thicknesses of plate glass which extends the full length without a single obstruction. Exterior electric lights are regular equipment. The rear of this model is of selected oak, finished in light oak. The four hinged doors leading into the display compartment have three thicknesses of double strength glass. Two wrapping shelves 24 inches wide and 9 inches deep, and scale stand 18" x 20" are regular equipment for this model. There are three large doors leading into the storage compartment. Nickel-plated bronze hardware, polished, fasteners of self-closing type. Storage and display doors are fitted with double gaskets.

Length	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
10'	2' 10"	4' 4"	48.12	58.75	1875 lbs.	<i>Dunbar</i>
Compartment		Width	Depth	Height	Door Opening	
Coil space (upper)		108 in.	8½ in.	6½ in.		
Coil space (lower)		108 in.	8½ in.	7 in.		
Upper		112 in.	24 in.	12 in.	23½ x 14 in.	
Center (front of lower coil)		110 in.	15 in.	7 in.	21¼ x 19½ in.	
Lower (under lower coil)		110 in.	24 in.	12 in.		



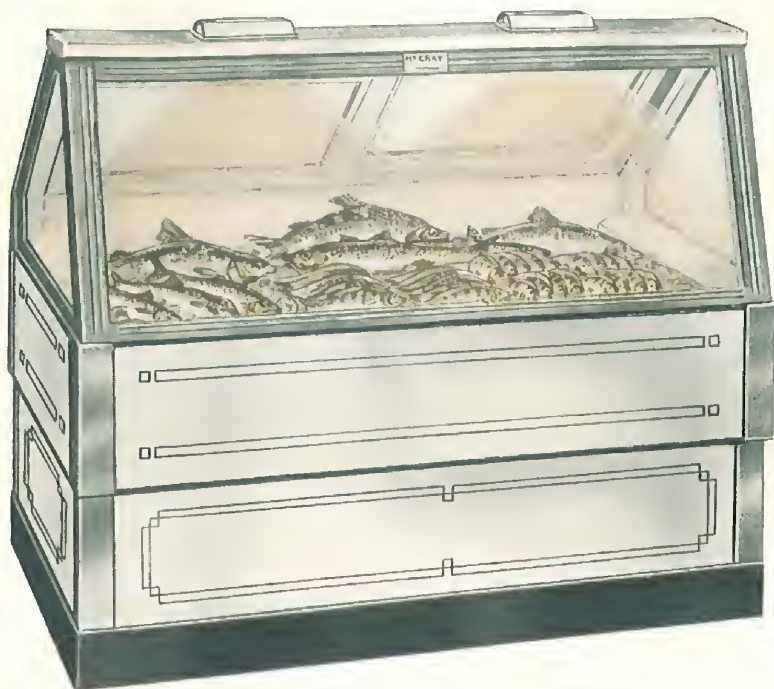



## McCray Model 505

*This model meets the need for the display of fish or sea-foods. It may also be used as an attractive window display.*

**E**XTERIOR, front, top and ends, is of white porcelain with black facing and base. Modeled Monel Metal trim. Interior of heavy rust-resisting metal covered with special white refrigerator enamel. Walls are approximately 4 inches thick, insulated with 3 inches of pure cork-board sealed with hydrolene. One thickness of plate glass in front and ends. Illuminated by two concealed exterior lights. These are equipped with 25-watt, 115 voltage tubular lamps. The rear of this model is of selected oak, finished in light oak. There are two sliding doors in the rear fitted with one thickness of double strength glass. Nickel-plated bronze hardware, polished. This model is especially designed for fish display. It is built for ice refrigeration, but coils for machine refrigeration may be placed in the bottom of the tank to reduce ice meltage. The ice tank in the bottom is 7½ inches deep.

Length 5'	Depth 2' 10"	Height 4' 2"	Ice Capacity 800 lbs.	Cu. Ft. Capacity 15.7	Shipping Weight 800 lbs.	Code Word <i>Debit</i>
Compartment Storage	Width 51½ in.	Depth 7 in. Top 25½ in. Bottom	Door Opening 2 Sliding Doors, 26½ x 19½ in.			

There are shelves available for this model so that it can be used for a delicatessen case.

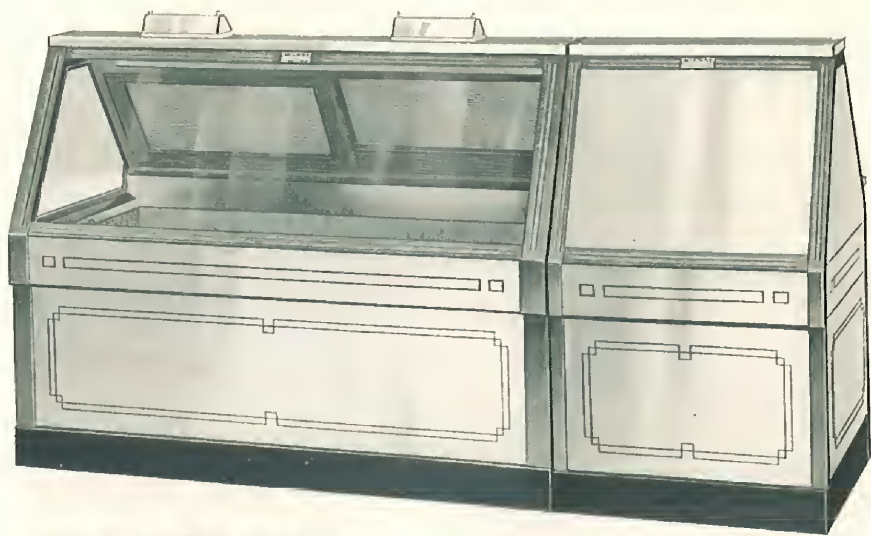


## McCray Model 42

*This model meets the need for the display of fish or sea foods.*

**E**XTERIOR, front, top and ends, are of white porcelain with black facing and base. Modeled Monel Metal trim. Interior of heavy rust-resisting metal, except exposed parts which are of Monel Metal. Interior ends of white porcelain. Walls are approximately 4 inches thick insulated with three inches of corkboard sealed with hydrolene. Front has one thickness of plate glass. Illuminated by two concealed exterior lights. The rear is of selected oak, finished in light oak. There are two sliding doors in the rear provided with bronze screen wire netting, not glazed. Wire netting provides sufficient interchange of air required for proper keeping of fish. Nickelplated bronze hardware, polished. Built for ice refrigeration, however, coils for machine refrigeration may be placed in the bottom of the tank to reduce ice meltage. Ice tank in the bottom is 7½ inches deep.

This model has a separate cleaning compartment, which is 30 inches wide, otherwise the same depth and height of the case proper. It may be placed on either end of the case or it may be set against a wall away from the case proper. It is equipped with a heavy maple scaling and cutting table. At right of cutting table there is a washing sink provided with an over-flow pipe which may be removed for draining.

Length 8'	Depth 2' 6"	Height 4' 2"	Ice Capacity 210 lbs.	Cu. Ft. Capacity 15.2	Shipping Weight 900 lbs.	Code Word Delight
Compartment Storage	Width 57 ½ in.	Depth 7 in. Top 22 in. Bot.	Door Opening 2 sliding sash, 15 ¼ in. x 26 in.			

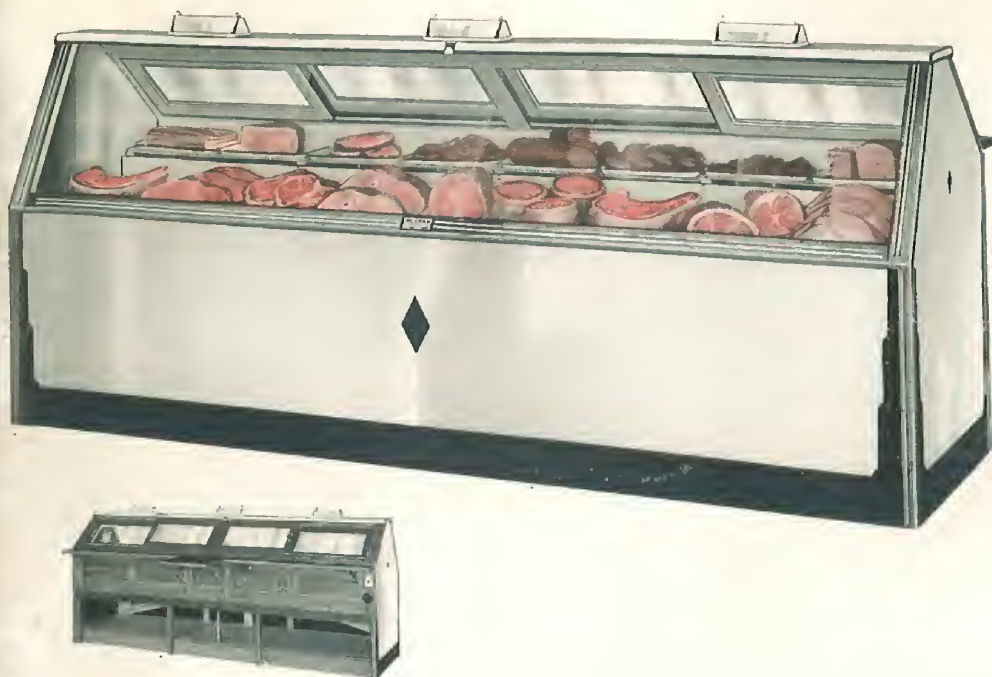


## McCray Models 89, 109, and 129

**E**XTERIOR, white porcelain with black decoration and base, trimmed with modeled chrome plated metal. Interior is of heavy galvanized iron, the floor and wood parts are covered with special white refrigerator enamel. Cooling chamber is also of heavy rust-resisting metal and the interior ends are covered with polished chrome plated metal. Porcelain covered baffles are removable to permit easy cleaning of interior. Walls are approximately 4 inches thick insulated with 2 inches of pure corkboard sealed with hydrolene. Front has two thicknesses of glass (outer course of plate) which is correctly sloped and extends the full length without a single obstruction. The rear of this model is of selected oak, finished in light oak, the sliding doors in the rear are equipped with two thicknesses of double strength glass which operate on black porcelain guides. Wrapping counter at exactly the right height extends across the entire back with a scale-stand in the center. Wrapping shelf is  $8\frac{1}{4}$  inches wide and scale-stand is 18 inches wide x  $20\frac{1}{2}$  inches deep. Height from floor to wrapping counter  $38\frac{3}{4}$  inches. These models are illuminated by concealed exterior lights. Models 89 and 109 have three lights and 129 has four lights. Nickel plated bronze hardware, polished. May be cooled by ice or mechanical refrigeration of any type, no changes necessary.

Model	Length	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
89	8'	2' 10"	4' 2"	17.69	25.40	1040 lbs.	Day
109	10'	2' 10"	4' 2"	22.36	31.86	1275 lbs.	Drum
129	12'	2' 10"	4' 2"	27.00	38.80	1470 lbs.	Dart

Compartment	Model	Width	Depth	Height	Door Opening
Cooling Chamber	89	91"	$8\frac{3}{4}$ "	$8\frac{1}{4}$ "	4 doors 18x13 $\frac{1}{4}$ in.
Cooling Chamber	109	115"	$8\frac{3}{4}$ "	$8\frac{1}{4}$ "	4 doors 24x13 $\frac{1}{4}$ in.
Cooling Chamber	129	139"	$8\frac{3}{4}$ "	$8\frac{1}{4}$ "	4 doors 30x13 $\frac{1}{4}$ in.

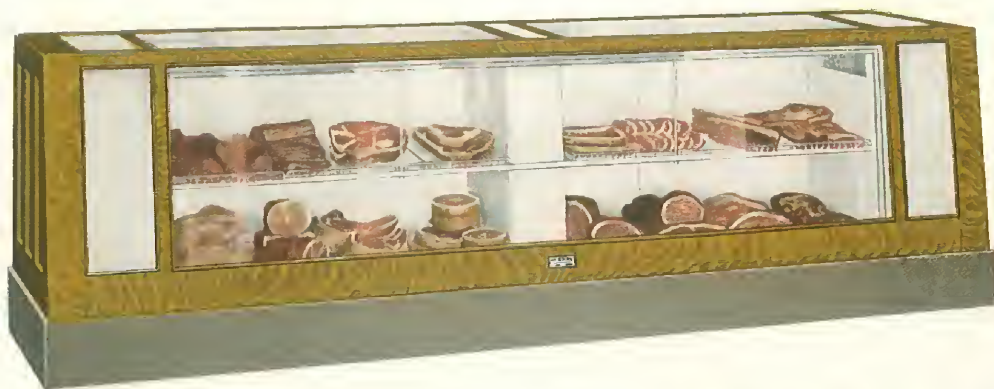


## McGray Model 3112

*This model is built for machine refrigeration only.*

**E**XTERIOR, front, top and ends, of quarter-sawed oak, finished in light oak. White opal glass panels in front and on top of coil space. Nine-inch green porcelain base. Walls are approximately 6 inches thick, insulated with 4 inches of pure corkboard, sealed with hydrolene. Interior is of heavy rust-resisting galvanized iron, covered with special white refrigerator enamel. Front and top are provided with three courses of clear plate glass. Coil space in each end and center. The rear of this model is of selected oak, finished in light oak. Coil space  $9\frac{1}{4}$  inches wide in each end, and  $8\frac{1}{4}$  inches wide in center. Access to coil space is through a plug door in the rear. There are eight service doors, so arranged that they are easy to work out of. Baffles are provided for each coil. Drain is through the rear. There are studs in the coil chamber for hanging of cooling units. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by any type of mechanical refrigeration. (See page 35 for models 3108 and 3110.)

Length	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
12'	3'	3' 8"	30.9	56.3	2250 lbs.	<i>Decimal</i>
Compartment	Width	Depth	Height	Door Opening		
Cooling chamber	$9\frac{1}{4}$ in.	$18\frac{3}{4}$ in. Top $23\frac{1}{4}$ in. Bottom	$33\frac{3}{4}$ in.	$8\frac{1}{4}$ x 31 in.		
Storage compartment	112 in.	21 in. Top $23\frac{3}{4}$ in. Bottom	33 in.	$21\frac{1}{4}$ x $12\frac{3}{4}$ in.		






## McCray Models 3108 and 3110

*These models are built for machine refrigeration only.*

**E**XTERIOR, front, top and ends, is of quarter-sawed oak, finished in light oak. White opal glass panels in front and on top of coil space. Nine-inch green porcelain base. Walls are approximately 6 inches thick, insulated with 4 inches of pure corkboard sealed with hydro-lene. Interior is of heavy rust-resisting galvanized iron, covered with special white refrigerator enamel. Front and top are provided with three courses of clear plate glass. Coil space in each end. The rear of these models is of selected oak, finished in light oak. Coil space  $9\frac{1}{4}$  inches wide in each end. Access to coil space is through a plug door in the rear. Model 3108 has four and Model 3110 has six service doors, so arranged that they are easy to work out of. Baffles are provided for each coil. Drain is through the rear. There are studs in the coil chamber for hanging of cooling units. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. These models may be cooled by any type of mechanical refrigeration. (See page 34 for model 3112.)

Model	Length	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
3108	8'	3'	3' 8"	19.34	34.5	1540 lbs.	<i>Dale</i>
3110	10'	3'	3' 8"	25.6	44.38	1875 lbs.	<i>Desire</i>
Compartment		Model	Width	Depth		Height	Door Opening
Cooling chamber		3108	9¼ in.	18¾ in. Top 23¼ in. Bottom		33¾ in.	8¼ x 31 in.
Cooling chamber		3110	9¼ in.	18¾ in. Top 23¼ in. Bottom		33¾ in.	8¼ x 31 in.
Storage compartment		3108	64 in.	21 in. Top 23¾ in. Bottom		33 in.	21¼ x 12¾ in.
Storage compartment		3110	88 in.	21 in. Top 23¾ in. Bottom		33 in.	21¼ x 12¾ in.


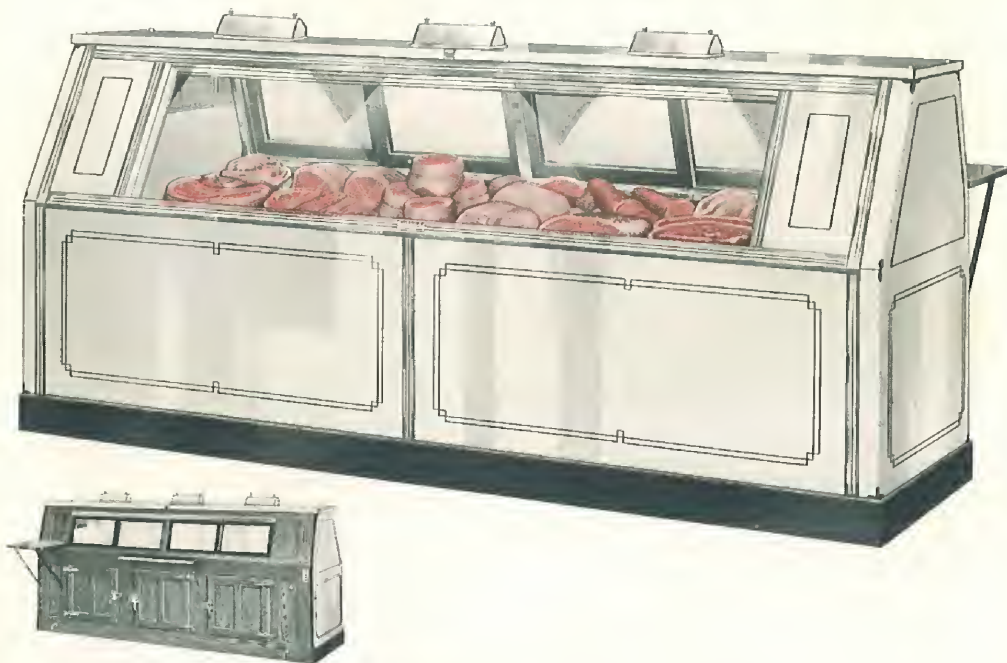


## McCray Models P-3208 and P-3210

*These models are built for machine refrigeration only*

**E**XTERIOR, front, top and ends, is of white porcelain with black facing and base, trimmed with modeled mirror finished Monel metal. Interior both display and storage compartments, including the floor, is of heavy rust-resisting galvanized iron. Walls are approximately 5 inches thick, insulated with 4 inches of pure corkboard sealed with hydrolene. The front has three thicknesses of plate glass.  $9\frac{1}{2}$ " coil space in each end. Entire case is cooled by the same coils. The rear of these models is of selected oak, finished in light oak. The sliding doors leading into the display compartment are of special composition, finished in black, and have two thicknesses of double strength glass. They operate on black porcelain guides. Wrapping shelf 36 inches wide and 9 inches deep is regular equipment. Scale-stand 18 inches wide and 20 inches deep may be attached at either end. Nickel-plated bronze hardware, polished, fasteners of self-closing type. Storage doors are fitted with gaskets. Model P-3208 is illuminated by two, and Model P-3210 by three concealed exterior lights. These models may be cooled by any type of machine refrigeration.

Model	Length	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
P-3208	8'	2' 10"	4' 4"	33.	47.	1500 lbs.	<i>Doubtless</i>
P-3210	10'	2' 10"	4' 4"	45.	58.75	1800 lbs.	<i>Diploma</i>
Compartment		Model	Width	Depth	Height	Door Opening	
Cooling chamber		3208	9 $\frac{1}{2}$ in.	11 in. Top 23 $\frac{1}{2}$ in. Bottom	42 in.		
Cooling chamber		3210	9 $\frac{1}{2}$ in.	11 in. Top 23 $\frac{1}{2}$ in. Bottom	42 in.		
Storage compartment		3208	65 in.	12 in. Top 23 $\frac{1}{2}$ in. Bottom	17 in. Top 24 in. Bottom	19 $\frac{1}{4}$ x 16 in. Top 21 $\frac{1}{8}$ x 19 $\frac{1}{2}$ in. Bottom	
Storage compartment		3210	89 in.	12 in. Top 23 $\frac{1}{2}$ in. Bottom	17 in. Top 24 in. Bottom	19 $\frac{1}{4}$ x 16 in. Top 21 $\frac{1}{8}$ x 19 $\frac{1}{2}$ in. Bottom	

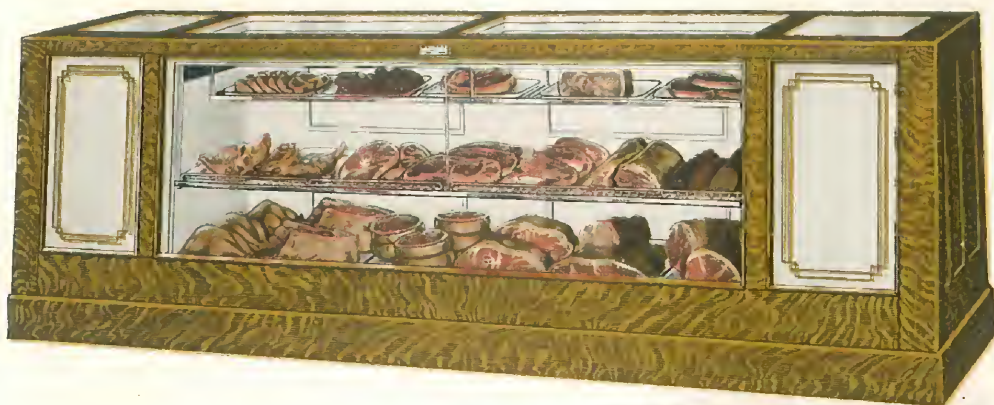

## McCray Models 841, 1041 and 1241

**E**XTERIOR, front, top and ends, wood parts of quarter-sawn oak, light oak finish. White porcelain panels in front and white opal glass panels in top of cooling chambers. Walls are approximately 5 inches thick insulated with three inches of pure corkboard. Interior is of heavy rust-resisting galvanized iron covered with special white refrigerator enamel. Front and top are provided with one course of clear plate glass and two courses of double strength glass. Model 1241 has three courses of plate glass in the front. Equipped with ice tanks for cooling with crushed ice and salt. The rear of these models is of selected oak, finished in light oak. Models 841 and 1041 have four, and Model 1241 has six service doors. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. These models may be cooled by ice or mechanical refrigeration of any type, no changes necessary.

Model	Length	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
841	8'	2' 7"	3' 4"	20.82	28.77	1235 lbs.	<i>Duel</i>
1041	10'	2' 7"	3' 4"	27.07	35.97	1500 lbs.	<i>Dredge</i>
1241	12'	2' 7"	3' 4"	35.38	43.16	1800 lbs.	<i>Dick</i>

Compartment	Model	Width	Depth	Height	Door Opening
Cooling chamber	841	13 in.	17½ in. Top 21½ in. Bottom	30½ in.	11 x 28¾ in.
Cooling chamber	1041	16 in.	17½ in. Top 21½ in. Bottom	30½ in.	14 x 28¾ in.
Cooling chamber	1241	16 in.	17½ in. Top 21½ in. Bottom	30½ in.	14 x 28¾ in.
Storage compartment	841	61 in.	17½ in. Top 21½ in. Bottom	30 in.	4 doors, 21¾ x 12½ in.
Storage compartment	1041	79 in.	17½ in. Top 21½ in. Bottom	30 in.	4 doors, 21¾ x 12½ in.
Storage compartment	1241	103 in.	17½ in. Top 21½ in. Bottom	30 in.	6 doors, 21¾ x 12½ in.



## Construction of McCray Hotel and Institution Refrigerators

**T**HE exterior of McCray Stock size refrigerators for Hotels and Institutions is either of solid oak or gleaming white porcelain fused on steel.

Where oak is used for the exterior, it is carefully selected and thoroughly cured in our kilns. While a highly polished exterior is no indication of a sanitary and efficient interior yet in the finish of all McCray Refrigerators and Coolers the same high standard of workmanship is maintained. They are carefully and accurately fitted, sanded perfectly smooth and finished with special water-resisting varnish—a four coat process.

The interior of the Hotel and Institution models shown in this catalog are either of odorless wood or gleaming white porcelain fused on steel. Where odorless wood is used it is thoroughly treated with two coats of special shellac, and the floor is covered with heavy galvanized sheet steel unless otherwise specified. This makes a strictly sanitary and durable lining.

The walls of our Hotel and Institution models are either approximately four or five inches thick, depending upon the size of the refrigerator. The insulating material used is pure corkboard sealed with hydrolene cement.


In all odorless wood lined refrigerators the shelves are also constructed of odorless wood shellacked. In the porcelain lined refrigerators we use special metal bar type shelves, construction consists of steel bars electrically welded into a single unit, and heavily tinned to prevent corrosion.

All hinges and fasteners are nickel-plated bronze and of our special design and weight, which assure perfectly fitting doors.

The requirements of Hotels, Restaurants, Clubs, Hospitals and Institutions vary to such an extent that there are scarcely any two that will require the same refrigerator equipment. We therefore not only build refrigerators of the styles and sizes shown on the following pages, but we make a specialty of built-to-order refrigerators and coolers and are equipped to build them in any desired style or size.

All McCray Refrigerators and Coolers, too large to be shipped "Set Up" are completely assembled and erected in our factory before they are knocked down and crated for shipment, each section is carefully numbered and marked before being knocked down. This eliminates any possibility of their not fitting properly and adds greatly to the ease of re-assembling at destination. We know that each section will fit because it has been set up in our plant before shipment.



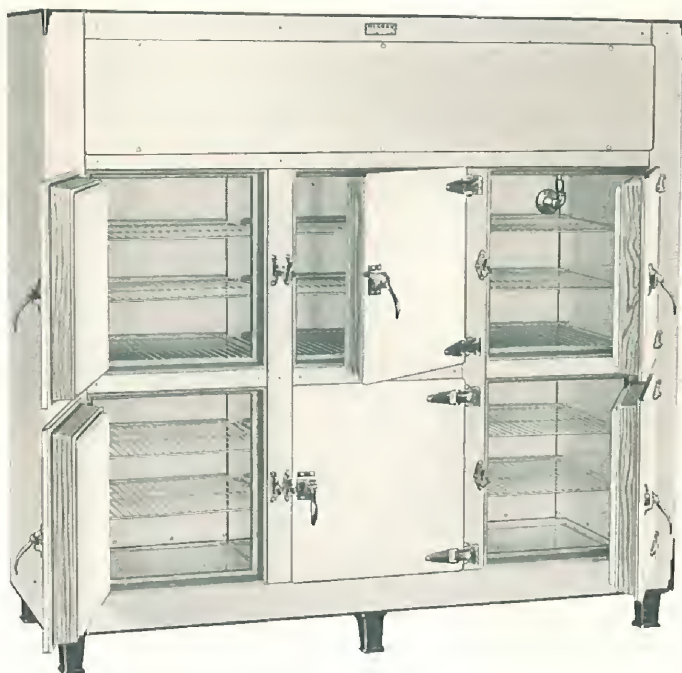


## McCray Model P-435

*This model is built for machine refrigeration only. Cooling chamber is overhead.*

**E**XTERIOR, white porcelain. Interior, white porcelain. Back and top are covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 3 inches of rock cork sealed with hydrolene. All doors are covered with white porcelain. Fifteen metal bar type shelves, electrically welded. This model is mounted on 5-inch black porcelain adjustable legs. Nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by any type of machine refrigeration.

Width 6' 9"	Depth 2' 6"	Height 6' 8"	Sq. Ft. Shelf Space 60.5	Cu. Ft. Capacity 61.32	Shipping Weight 1950 lbs.	Code Word Gallop
Compartments	Width	Depth	Height	Door Openings		
Cooling chamber	72 3/4 in.	18 in.	10 1/2 in.	69 1/4 x 9 1/2 in.		
Upper left-hand	24 in.	22 in.	24 1/2 in.	19 1/4 x 22 1/4 in.		
Upper right-hand	24 in.	22 in.	24 1/2 in.	19 1/4 x 22 1/4 in.		
Upper center	24 1/2 in.	22 in.	24 1/2 in.	19 1/4 x 22 1/4 in.		
Lower left-hand	24 in.	22 in.	26 1/2 in.	19 1/4 x 22 1/4 in.		
Lower right-hand	24 in.	22 in.	26 1/2 in.	19 1/4 x 22 1/4 in.		
Lower center	24 1/2 in.	22 in.	26 1/2 in.	19 1/4 x 22 1/4 in.		

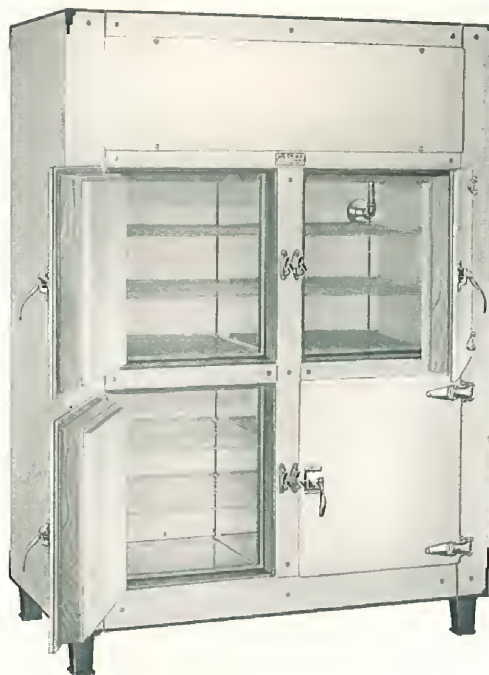


## McCray Model P-434

*This model is built for machine refrigeration only. Cooling chamber is overhead.*

**E**XTERIOR, white porcelain. Interior white porcelain. Back and top are covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick insulated with 3 inches of rock cork, sealed with hydrolene. All doors are covered with white porcelain. Ten metal bar type shelves electrically welded. This model is mounted on 5 inch black porcelain adjustable legs. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by any type of machine refrigeration.

Width 4' 8"	Depth 2' 6"	Height 6' 8"	Sq. Ft. Shelf Space 43.9	Cu. Ft. Capacity 40.9	Shipping Weight 1500 lbs.	Code Word Gallant
Compartment	Width	Depth	Height			Door Opening
Cooling Chamber	48 in.	18 in.	10½ in.			44½x 9½ in.
Upper left-hand	24 in.	22 in.	24½ in.			19½x22¼ in.
Upper right-hand	24 in.	22 in.	24½ in.			19½x22¼ in.
Lower right-hand	24 in.	22 in.	26½ in.			19½x22¼ in.
Lower left-hand	24 in.	22 in.	26½ in.			19½x22¼ in.

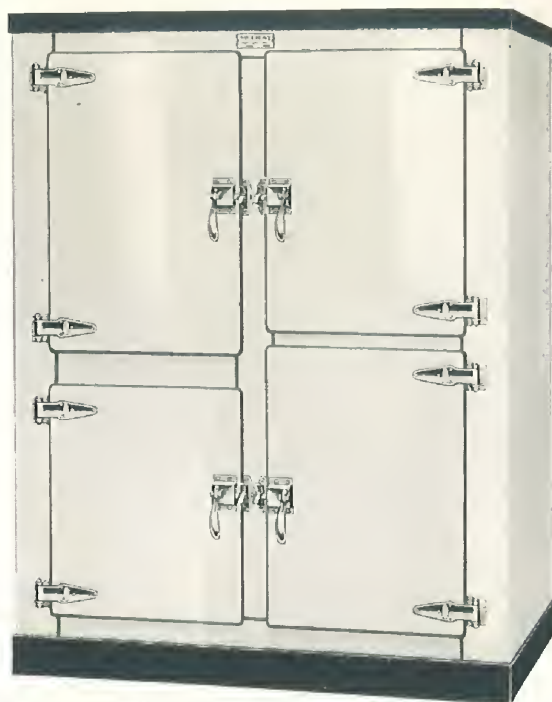

## McCray Model P-375

**E**XTERIOR, white porcelain. Interior, white porcelain. Back and top are covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Six metal bar shelves, electrically welded. Base and cornice are of black porcelain. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 4 $\frac{5}{8}$ "	2' 8 $\frac{1}{4}$ "	6' $\frac{3}{4}$ "	275 lbs.	27.39	32.6	1275 lbs.	Senator
Compartment			Width	Depth	Height	Door Opening	
*Cooling chamber			21 in.	23 $\frac{3}{4}$ in.	32 $\frac{5}{8}$ in.	17 $\frac{3}{4}$ x 30 in.	
Upper right-hand			21 in.	23 $\frac{3}{4}$ in.	28 $\frac{1}{2}$ in.	17 $\frac{3}{4}$ x 26 in.	
Lower right-hand			21 in.	23 $\frac{3}{4}$ in.	28 $\frac{1}{2}$ in.	17 $\frac{3}{4}$ x 26 in.	
Under cooling chamber			21 in.	23 $\frac{3}{4}$ in.	24 in.	17 $\frac{3}{4}$ x 22 in.	

\*Ice racks omitted.



## McCray Model P-320

**E**XTERIOR, white porcelain. Interior, white porcelain. Back and top are covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Nine metal bar shelves, electrically welded. Base and cornice are of black porcelain. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
5' 9 <sup>3</sup> / <sub>8</sub> "	2' 8 <sup>1</sup> / <sub>4</sub> "	6' <sup>3</sup> / <sub>8</sub> "	280 lbs.	36.4	43.2	1600 lbs.	Sunset
Compartment	Width	Depth	Height	Door Opening			
*Cooling chamber	19 in.	23 <sup>3</sup> / <sub>4</sub> in.	35 <sup>5</sup> / <sub>8</sub> in.	15 <sup>1</sup> / <sub>2</sub> x 33 in.			
Under cooling chamber	19 in.	23 <sup>3</sup> / <sub>4</sub> in.	21 in.	15 <sup>1</sup> / <sub>2</sub> x 19 in.			
Upper right-hand	19 in.	23 <sup>3</sup> / <sub>4</sub> in.	22 <sup>1</sup> / <sub>2</sub> in.	15 <sup>1</sup> / <sub>2</sub> x 19 in.			
Lower right-hand	19 in.	23 <sup>3</sup> / <sub>4</sub> in.	34 <sup>1</sup> / <sub>2</sub> in.	15 <sup>1</sup> / <sub>2</sub> x 33 in.			
Upper left-hand	19 in.	23 <sup>3</sup> / <sub>4</sub> in.	22 <sup>1</sup> / <sub>2</sub> in.	15 <sup>1</sup> / <sub>2</sub> x 19 in.			
Lower left-hand	19 in.	23 <sup>3</sup> / <sub>4</sub> in.	34 <sup>1</sup> / <sub>2</sub> in.	15 <sup>1</sup> / <sub>2</sub> x 33 in.			

\*Ice racks omitted.





## McCray Model P-332

**E**XTERIOR, white porcelain. Interior, white porcelain. Back and top are covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Six metal bar shelves, electrically welded. Base and cornice are of black porcelain. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. Compartment at right equipped with meat rails and hooks. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
7' $\frac{3}{8}$ "	2' $8\frac{1}{4}$ "	6' $2\frac{3}{8}$ "	450 lbs.	33.5	56.5	1900 lbs.	Senior
Compartment	Width	Depth	Height	Door Opening			
*Cooling chamber	26 in.	23 $\frac{3}{4}$ in.	38 $\frac{3}{4}$ in.	22 $\frac{1}{2}$ x 36 in.			
Under cooling chamber	26 in.	23 $\frac{3}{4}$ in.	20 in.	22 $\frac{1}{2}$ x 18 in.			
Right-hand	23 in.	23 $\frac{3}{4}$ in.	59 in.	19 $\frac{1}{2}$ x 58 $\frac{1}{4}$ in.			
Upper left-hand	23 in.	23 $\frac{3}{4}$ in.	25 $\frac{1}{2}$ in.	19 $\frac{1}{2}$ x 22 in.			
Lower left-hand	23 in.	23 $\frac{3}{4}$ in.	33 $\frac{1}{2}$ in.	19 $\frac{1}{2}$ x 32 in.			

\*Ice racks omitted.



## McCray Model P-425

*This model is built for machine refrigeration only. Cooling Chamber is overhead.*

**E**XTERIOR, white porcelain. Interior, white porcelain. Back and top are covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Four upper display doors have three thicknesses of double strength glass. Two lower doors are covered with white porcelain. Ten metal bar type shelves, electrically welded. Base and cornice are of black porcelain. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by any type of machine refrigeration.

Width	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 9"	2' 6 1/2"	7'	45.	45.62	1450 lbs.	Grape

Compartment	Width	Depth	Height	Door Opening
Cooling chamber	48 in.	18 1/2 in.	9 in.	46 1/4 x 7 1/8 in.
Upper left-hand	24 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/8 in.
Upper right-hand	24 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/8 in.
Center left-hand	24 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/8 in.
Center right-hand	24 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/8 in.
Lower left-hand	24 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/8 in.
Lower right-hand	24 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/8 in.



## McCray Model P-424

*This model is built for machine refrigeration only. Cooling chamber is overhead.*

**E**XTERIOR white porcelain. Interior, white porcelain. Back and top are covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Six upper display doors have three thicknesses of double strength glass. Three lower doors are covered with white porcelain. Fifteen metal bar type shelves, electrically welded. Base and cornice are of black porcelain. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by any type of machine refrigeration.

Width	Depth	Height	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
6' 11"	2' 6 1/2"	7'	69.36	70.33	1900 lbs.	Gong
Compartment		Width	Depth	Height	Door Opening	
Cooling chamber		74 in.	18 1/2 in.	9 in.	72 1/8 x 7 1/8 in.	
Upper left-hand		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	
Upper center		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	
Upper right-hand		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	
Center left-hand		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	
Center		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	
Center right-hand		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	
Lower left-hand		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	
Lower center		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	
Lower right-hand		24 3/8 in.	22 1/2 in.	19 in.	20 1/2 x 16 1/2 in.	



## McCray Models 350 and 360

**E**XTERIOR of quarter-sawn oak, finished in light oak. Interior, white porcelain. Walls are approximately 4 inches thick insulated with 2 inches of pure corkboard sealed with hydrolene. Five metal bar shelves electrically welded. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. These models may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.


Model	Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
350	3' 4"	2'	4' 7 1/2"	125 lbs.	12.	14.	600 lbs.	<i>Sailor</i>
360	3' 7"	2' 2"	4' 11 1/2"	175 lbs.	15.	18.5	700 lbs.	<i>Saddle</i>

Compartment	Width		Depth		Height		Door Opening	
	360	350	360	350	360	350	360	350
*Cooling chamber	18 1/8 in.	16 3/8 in.	20 1/4 in.	18 1/8 in.	25 3/4 in.	23 3/4 in.	14 3/4 x 23 in.	13 1/4 x 21 in.
Upper right-hand	15 3/8 in.	14 3/8 in.	19 3/4 in.	17 3/4 in.	22 1/4 in.	20 1/4 in.	14 1/2 x 19 1/2 in.	13 x 17 1/2 in.
Lower right-hand	15 3/8 in.	14 3/8 in.	19 3/4 in.	17 3/4 in.	22 1/4 in.	20 1/4 in.	14 1/2 x 19 1/2 in.	13 x 17 1/2 in.
Under cooling chamber	19 3/4 in.	18 3/4 in.	19 3/4 in.	17 3/4 in.	13 1/2 in.	11 1/2 in.	14 1/2 x 15 in.	13 x 13 in.

\*Ice racks omitted.



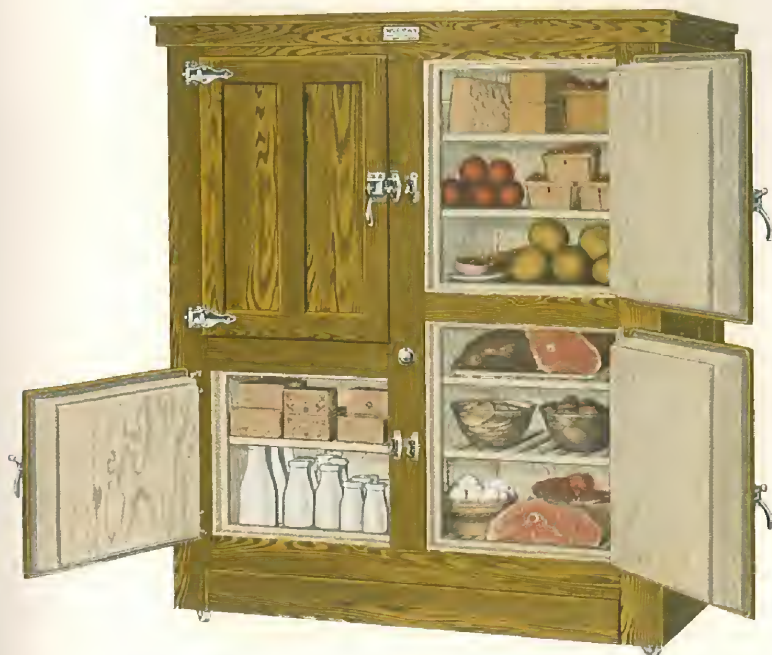

## McCray Model 60

**E**XTERIOR of selected oak, finished in light oak. Interior of five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting, galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Six odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 6 <sup>3</sup> / <sub>4</sub> "	2' 6 <sup>3</sup> / <sub>4</sub> "	5' 6"	250 lbs.	25.25	30.	850 lbs.	Whale
Compartment	Width	Depth	Height	Door Opening			
*Cooling chamber	21 <sup>3</sup> / <sub>4</sub> in.	21 <sup>5</sup> / <sub>8</sub> in.	30 in.	18 <sup>1</sup> / <sub>4</sub> x 27 <sup>1</sup> / <sub>2</sub> in.			
Upper right-hand	21 <sup>5</sup> / <sub>8</sub> in.	21 <sup>5</sup> / <sub>8</sub> in.	26 <sup>3</sup> / <sub>4</sub> in.	18 <sup>1</sup> / <sub>4</sub> x 22 <sup>1</sup> / <sub>4</sub> in.			
Lower right-hand	21 <sup>5</sup> / <sub>8</sub> in.	21 <sup>5</sup> / <sub>8</sub> in.	26 <sup>3</sup> / <sub>4</sub> in.	18 <sup>1</sup> / <sub>4</sub> x 22 <sup>1</sup> / <sub>4</sub> in.			
Under cooling chamber	21 <sup>3</sup> / <sub>4</sub> in.	21 <sup>5</sup> / <sub>8</sub> in.	19 in.	18 <sup>1</sup> / <sub>4</sub> x 16 <sup>1</sup> / <sub>4</sub> in.			

\*Ice racks omitted.



## McCray Model 75

**E**XTERIOR of selected oak, finished in light oak. Interior, five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick insulated, with 2 inches of pure corkboard sealed with hydrolene. Six odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 8 1/2"	2' 3 1/4"	6'	260 lbs.	22.75	29.5	900 lbs.	Whip
Compartment		Width	Depth	Height	Door Opening		
*Cooling chamber		22 1/2 in.	18 5/8 in.	33 1/2 in.	19 1/4 x 31	in.	
Upper right-hand		22 1/8 in.	18 5/8 in.	29 1/4 in.	19 1/4 x 26	in.	
Lower right-hand		22 1/8 in.	18 5/8 in.	29 1/4 in.	19 1/4 x 26	in.	
Under cooling chamber		22 1/2 in.	18 5/8 in.	21 in.	19 1/4 x 18 1/4	in.	

\*Ice racks omitted.



## McCray Model 750

**E**XTERIOR of selected oak, finished in light oak. Interior, white porcelain with Monel Metal corners. Floor covered with bright rust-resisting metal. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Six metal bar shelves. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 8 1/2"	2' 3 1/4"	6'	260 lbs.	22.75	29.5	1050 lbs.	Scarlet

Compartment	Width	Depth	Height	Door Opening
*Cooling chamber	22 1/2 in.	18 5/8 in.	33 1/4 in.	19 1/4 x 31 in.
Upper right-hand	22 in.	18 5/8 in.	29 3/4 in.	19 1/4 x 25 3/4 in.
Lower right-hand	22 in.	18 5/8 in.	29 3/4 in.	19 1/4 x 25 3/4 in.
Under cooling chamber	22 3/8 in.	18 5/8 in.	21 in.	19 1/4 x 18 1/4 in.

\*Ice racks omitted.



## McCray Model 426

**E**XTERIOR of selected oak, finished in light oak. Interior, five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard, sealed with hydrolene. Four odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. Lower right-hand compartment equipped with four short-order drawers. These are made of heavy rust-resisting galvanized iron, except the front which is of selected oak. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 8 1/2"	2' 3 1/4"	6'	260 lbs.	13.7	29.5	1050 lbs.	Wedge
Compartment		Width	Depth	Height	Door Opening		
*Cooling chamber		22 1/2 in.	18 5/8 in.	33 1/2 in.	19 1/4 x 31 in.		
Upper right-hand		22 1/2 in.	18 5/8 in.	29 3/4 in.	19 1/4 x 26 in.		
Lower right-hand		22 1/2 in.	18 5/8 in.	29 3/4 in.	4 Drawers 19 3/4 x 16 1/4 x 4 in.		
Under cooling chamber		22 1/2 in.	18 5/8 in.	21 in.			

\*Ice racks omitted.





## McCray Model 432

**E**XTERIOR of selected oak, finished in light oak. Interior, five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Nine odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. Lower left-hand compartment equipped with four short order drawers. These are made of heavy rust-resisting galvanized iron, except the front, which is of selected oak. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
7' 3 1/4"	2' 7 1/4"	6' 3"	425 lbs.	40.72	63.5	1525 lbs.	Wand

Compartment	Width	Depth	Height	Door Opening
*Cooling chamber	28 1/2 in.	22 5/8 in.	34 in.	22 1/4 x 31 1/4 in.
Under cooling chamber	28 1/2 in.	22 5/8 in.	21 in.	22 1/4 x 18 1/4 in.
Upper right-hand	22 3/4 in.	22 5/8 in.	26 1/2 in.	20 1/4 x 22 1/4 in.
Lower right-hand	22 3/4 in.	22 5/8 in.	36 in.	20 1/4 x 31 1/4 in.
Upper left-hand	22 3/4 in.	22 5/8 in.	26 1/2 in.	20 1/4 x 22 1/4 in.
Lower left-hand	22 3/4 in.	22 5/8 in.	36 in.	4 Drawers 20 5/8 x 20 1/8 x 5 5/8 in.

\*Ice racks omitted.




## McCray Model 375

**E**XTERIOR of selected oak, finished in light oak. Interior, white porcelain. Walls are approximately 4 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Six metal bar shelves, electrically welded. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
4' 4½"	2' 6"	6'	250 lbs.	24.73	30.58	1150 lbs.	<i>Supreme</i>
Compartment			Width	Depth	Height	Door Opening	
*Cooling chamber			21 in.	22 in.	32 in.	17¾ x 30 in.	
Under cooling chamber			21 in.	22 in.	22 in.	17¾ x 22 in.	
Upper right-hand			21 in.	22 in.	28½ in.	17¾ x 26 in.	
Lower right-hand			21 in.	22 in.	28½ in.	17¾ x 26 in.	

\*Ice racks omitted.

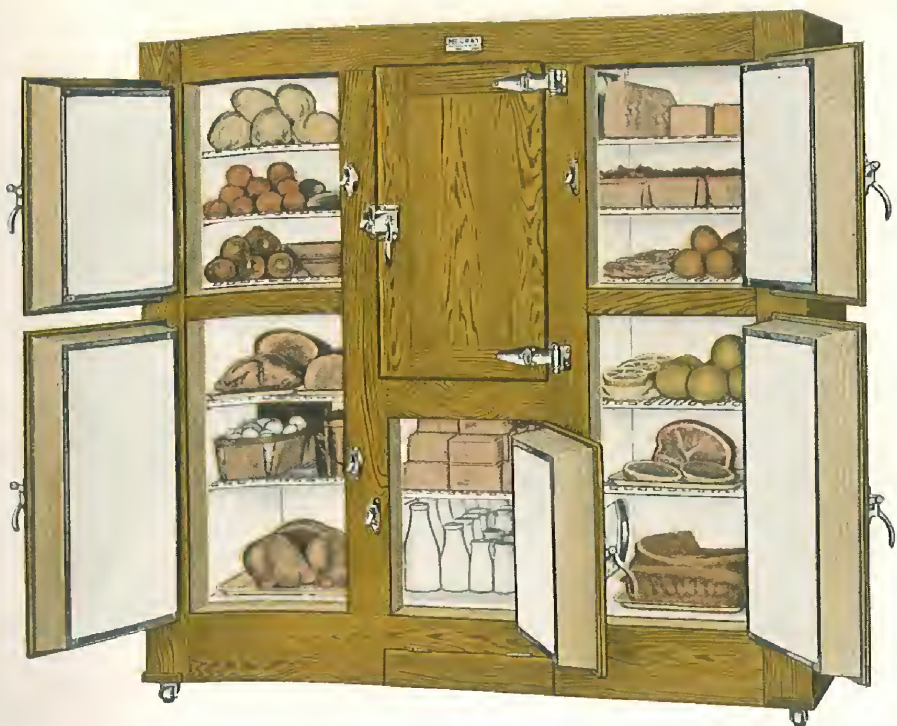

## McCray Model 320

**E**XTERIOR of selected oak, finished in light oak. Interior, white porcelain. Walls are approximately 4 inches thick, insulated with 3 inches of pure corkboard, sealed with hydro-lene. Eleven metal bar shelves, electrically welded. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
5' 9"	2' 6"	6'	240 lbs.	36.35	41.5	1425 lbs.	Surprise
Compartment			Width	Depth	Height	Door Opening	
*Cooling chamber			19 in.	22 in.	32 in.	15½ x 30 in.	
Under cooling chamber			19 in.	22 in.	20½ in.	15½ x 22 in.	
Upper right-hand			19 in.	22 in.	25 in.	15½ x 22 in.	
Lower right-hand			19 in.	22 in.	32 in.	15½ x 30 in.	
Upper left-hand			19 in.	22 in.	25 in.	15½ x 22 in.	
Lower left-hand			19 in.	22 in.	32 in.	15½ x 30 in.	

\*Ice racks omitted.





## McCray Models 120 and 132


**E**XTERIOR of selected oak, finished in light oak. Interior, five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick insulated with 2 inches of pure corkboard sealed with hydrolene. Eleven odorless wood shelves, shellacked. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. These models may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Model	Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
120	6' 3 1/2"	2' 5 1/2"	6' 3"	340 lbs.	37.5	44.2	1160 lbs.	<i>Wind</i>
132	7' 3 1/2"	2' 7 1/4"	6' 3"	425 lbs.	52.25	63.51	1400 lbs.	<i>Witness</i>

*Compartment	Width		Depth		Height		Door Opening	
	120	132	120	132	120	132	120	132
Cooling chamber	23 1/2 in.	28 1/2 in.	20 3/4 in.	22 5/8 in.	37 in.	34 in.	19 1/4 x 34 1/2 in.	22 1/4 x 31 1/4 in.
Under cooling chamber	23 1/2 in.	28 1/2 in.	20 3/4 in.	22 5/8 in.	17 in.	21 in.	19 1/4 x 14 1/4 in.	22 1/4 x 18 1/4 in.
Upper right-hand	17 3/4 in.	22 3/4 in.	20 3/4 in.	22 5/8 in.	25 in.	26 1/2 in.	15 1/4 x 21 1/4 in.	20 1/4 x 22 1/4 in.
Lower right-hand	17 3/4 in.	22 3/4 in.	20 3/4 in.	22 5/8 in.	34 1/2 in.	36 3/4 in.	15 1/4 x 30 1/4 in.	20 1/4 x 31 1/4 in.
Upper left-hand	17 3/4 in.	22 3/4 in.	20 3/4 in.	22 5/8 in.	25 in.	26 1/2 in.	15 1/4 x 21 1/4 in.	20 1/4 x 22 1/4 in.
Lower left-hand	17 3/4 in.	22 3/4 in.	20 3/4 in.	22 5/8 in.	34 1/2 in.	36 3/4 in.	15 1/4 x 30 1/4 in.	20 1/4 x 31 1/4 in.

\*Ice racks omitted.



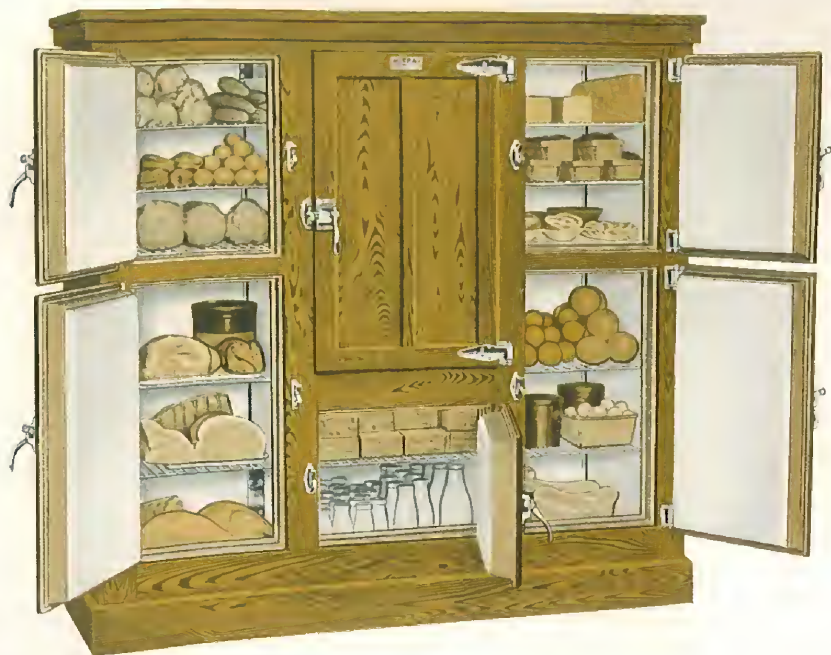

## McCray Model 1200

**E**XTERIOR of selected oak, finished in light oak. Interior white porcelain with Monel Metal corners. Floor covered with bright rust-resisting metal. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Eleven metal bar shelves, nickel-plated bronze hardware, polished. Fasteners of self-closing type. All doors fitted with gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
6' 1/2"	2' 5 1/4"	6'	340 lbs.	37.5	44.2	1350 lbs.	Salad

Compartment	Width	Depth	Height	Door Opening
*Cooling chamber	23 3/8 in.	20 3/8 in.	37 in.	19 1/4 x 34 1/2 in.
Under cooling chamber	23 3/8 in.	20 3/8 in.	17 in.	19 1/4 x 14 1/4 in.
Upper right-hand	17 3/8 in.	20 3/8 in.	25 in.	15 1/4 x 21 1/4 in.
Lower right-hand	17 3/8 in.	20 3/8 in.	34 1/2 in.	15 1/4 x 30 1/4 in.
Upper left-hand	17 3/8 in.	20 3/8 in.	25 in.	15 1/4 x 21 1/4 in.
Lower left-hand	17 3/8 in.	20 3/8 in.	34 1/2 in.	15 1/4 x 30 1/4 in.

\*Ice racks omitted.




## McCray Models 1132 and 1135

**E**XTERIOR of selected oak, finished in light oak. Interior, five-ply laminated odorless wood, shellacked. Floor covered with heavy rust-resisting galvanized iron. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. Model 1132 has seven odorless wood shelves, shellacked, and Model 1135 has eight. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. Compartment at right equipped with meat rails and hooks. These models may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Model	Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
1132	7' 3 $\frac{1}{2}$ "	2' 7 $\frac{1}{4}$ "	6' 3"	425 lbs.	38	63.5	1450 lbs.	Widow
1135	7' 9 $\frac{1}{2}$ "	2' 10 $\frac{3}{4}$ "	7'	630 lbs.	51.83	88.56	1800 lbs.	Wizard

Compartment	Width		Depth		Height		Door Opening	
	1132	1135	1132	1135	1132	1135	1132	1135
*Cooling chamber	28 $\frac{1}{2}$ in.	30 in.	22 $\frac{3}{4}$ in.	26 in.	34 in.	39 in.	22 $\frac{1}{4}$ x 31 $\frac{1}{4}$ in.	23 $\frac{1}{4}$ x 36 $\frac{1}{4}$ in.
Under cooling chamber	28 $\frac{1}{2}$ in.	30 in.	22 $\frac{3}{4}$ in.	26 in.	21 in.	24 in.	22 $\frac{1}{4}$ x 18 $\frac{1}{4}$ in.	23 $\frac{1}{4}$ x 21 $\frac{1}{4}$ in.
Right-hand	22 $\frac{3}{4}$ in.	25 in.	22 $\frac{3}{4}$ in.	26 in.	62 $\frac{1}{2}$ in.	70 $\frac{1}{2}$ in.	20 $\frac{1}{4}$ x 58 $\frac{1}{4}$ in.	21 $\frac{1}{4}$ x 66 $\frac{1}{4}$ in.
Upper left-hand	22 $\frac{3}{4}$ in.	25 in.	22 $\frac{3}{4}$ in.	26 in.	25 in.	29 $\frac{1}{4}$ in.	20 $\frac{1}{4}$ x 22 $\frac{1}{4}$ in.	21 $\frac{1}{4}$ x 25 $\frac{1}{4}$ in.
Lower left-hand	22 $\frac{3}{4}$ in.	25 in.	22 $\frac{3}{4}$ in.	26 in.	37 $\frac{1}{2}$ in.	41 $\frac{1}{4}$ in.	20 $\frac{1}{4}$ x 31 $\frac{1}{4}$ in.	21 $\frac{1}{4}$ x 36 $\frac{1}{4}$ in.

\*Ice racks omitted.

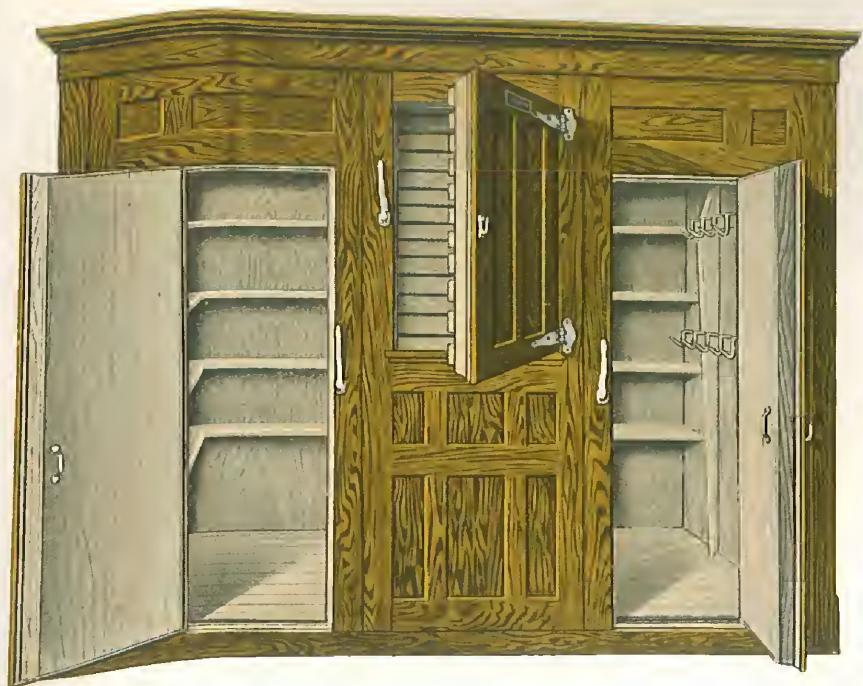

## McCray Model 171

**E**XTERIOR, selected oak, finished in light oak. Interior, odorless wood, shellacked. Floor is of hardwood. Walls are approximately 5 inches thick, insulated with 3 inches of pure cork-board sealed with hydrolene. Nickel-plated bronze hardware, polished. All doors fitted with double gaskets. Compartment at right equipped with shelves, meat rails and hooks. Compartment at left equipped with shelves only. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary.

Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
10'	5'	8'	2100 lbs.	273.72	4500 lbs.	Wolf
Compartment	Width	Depth	Height	Door Opening		
*Cooling chamber	28½ in.	46½ in.	63 in.	24½ x 36½ in.		
Right-hand	36¼ in.	50 in.	86 in.	20½ x 68 in.		
Left-hand	36¼ in.	50 in.	86 in.	20½ x 68 in.		

\*With ice racks in place.



## McCray Model 2188

BUILT TO ORDER ONLY

**E**XTERIOR, front and left end, of selected oak, finished in light oak. Interior, odorless wood, shellacked. Floor of hardwood. Walls are approximately 5 inches thick insulated with 3 inches of pure corkboard sealed with hydrolene. Interior is equipped with shelves, meat racks and hooks. Nickel-plated bronze hardware, polished, fasteners of self closing type. All doors fitted with double gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. Cooling chamber is overhead.

Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
7'	5'	9' 10"	1500 lbs.	231.25	3500 lbs.	<i>Meter</i>

Inside Size of Ice Chamber  
71 in. wide, 32 in. deep, 27½ in. high

Cooling Chamber Door  
24¾ in. wide, 22½ in. high





## McCray Model 3175

BUILT TO ORDER ONLY

**E**XTERIOR, front and right end, selected oak, finished in light oak. Interior, odorless wood, shellacked. Floor of hardwood. Walls are approximately 5 inches thick, insulated with 3 inches of pure corkboard sealed with hydrolene. Compartment in center fitted with meat racks. Compartments at left and right fitted with shelving. There are solid partitions separating the center compartment from the right and left compartment. Nickel-plated bronze hardware, polished. All doors fitted with double gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. Cooling chamber overhead.

Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
12'	5'	11'	3600 lbs.	473.03	7500 lbs.	<i>Dormant</i>

Inside Size of Ice Chamber  
26½ in. wide, 48 in. deep, 35 in. high

(Three Ice Chambers)

Cooling Chamber Door  
24¾ in. wide, 22½ in. high


## McCray Ice Chests

### Models 1, 2 and 3

THE front and two ends of these chests are of selected oak, finished in light oak. The top is covered with metal. Walls are approximately three inches thick, insulated with 1 inch of pure corkboard sealed with hydrolene. Interior lining is of heavy galvanized sheet steel. In the bottom of each chest is a heavy oak rack to keep the ice off the galvanized sheet steel floor.



No.	Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
1	31 1/2 in.	25 3/4 in.	34 in.	250 lbs.	5.8	300 lbs.	<i>Cab</i>
2	47 1/2 in.	25 3/4 in.	34 in.	430 lbs.	9.67	400 lbs.	<i>Cabin</i>
3	65 1/2 in.	25 3/4 in.	34 in.	600 lbs.	14.	500 lbs.	<i>Cabinet</i>

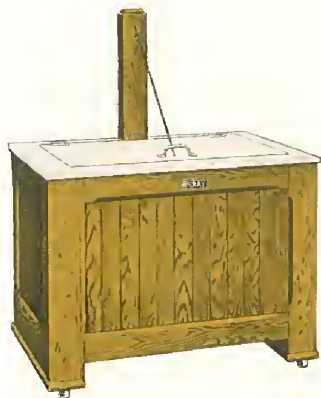

## McCray Ice Chests

### Models 5 and 10

THESE ice chests are solidly constructed. The exterior, three sides, are of selected oak, finished in light oak. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. The top is covered with galvanized iron. The interior is lined with heavy galvanized iron and provided with a strong floor rack to support the ice. There is a counterweight attached to lift lids which greatly facilitates the use of these chests.

No.	Width	Depth	Height	Ice Capacity	Cu. Ft. Capacity	Shipping Weight	Code Word
5	3' 6"	2' 7"	2' 8"	350 lbs.	7.7	525 lbs.	<i>Cameo</i>
10	6' 5"	2' 7"	2' 8"	700 lbs.	14.14	800 lbs.	<i>Camera</i>

## McCray Florist Refrigerators

THE successful florist realizes the importance, or rather the absolute necessity, of an equipment that will properly preserve the freshness, beauty and fragrance of cut flowers, and at the same time permit an attractive display that will result in a substantial increase in sales.

Unlike perishable food products, flowers are generally looked upon as a luxury rather than a necessity, and buyers are attracted by their beauty and fragrance, therefore the importance of an attractive display that will create a desire to purchase. It is to meet this condition that we have designed a line of special refrigerators that are particularly adapted to the requirements of the enterprising florist.

The designs shown on the following pages are not experimental but are the result of years of successful effort to supply flower stores with a line of refrigerators that are constructed in accordance with scientific principles, that insure the highest degree of efficiency in the preservation of cut flowers and at the same time offer the advantages of an attractive display that is irresistible to flower lovers.

All material entering into the construction of McCray Florist Refrigerators is of the very highest grade. All wood is carefully selected and thoroughly air and kiln cured. The construction is performed by experienced workmen under the advantages of a modern manufacturing plant equipped with the latest improved machinery.

The interiors of McCray Florist Refrigerators are usually of snow white enamel, opal glass or mirrors. In the built-to-order refrigerators, however, the interior finish and floor are subject to some variation to suit the customer's taste, such as substitution of black opal glass for mirrors, dark for light finish, colored floors, etc. The exterior may be finished either in white enamel, light oak, forest green, mahogany, or enamel in colors or we can match any interior woodwork or fixtures, if sample is furnished with the order.

Extra shelves can be furnished at slight additional cost.

The walls of the McCray Florist Refrigerators are insulated with pure cork-board, which is sealed at all joints with hydrolene cement. This sealing is of utmost importance.

In the event the dimensions given on any of the designs shown are not suited to the space that is available, we can change them to meet your requirements if you will send us a rough sketch of floor space and advise us of your desires.

Every design shown in this catalog has rendered satisfactory service in some of the largest and best-equipped flower stores in the country.



## McCray Model 620

**E**XTERIOR, front and two ends of selected birch. It is carried in stock in white enamel, mahogany finish, and forest green. Interior of heavy rust-resisting galvanized iron covered with special white refrigerator enamel. Display compartment as well as the display doors is equipped with two thicknesses of double strength glass with air space between. Shelves are removable. Three galvanized drawers underneath the display doors; these however, are not refrigerated. Cooling chamber door is provided with a bevel plate mirror, nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with gaskets. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary. There are studs in the ice chamber for hanging of mechanical unit.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
7' 1"	2' 5"	6' 8"	330 lbs.	17.64	54.40	1300 lbs.	Fort
Compartment		Width	Depth	Height	Door Opening		
*Cooling chamber		25 in.	20 $\frac{3}{4}$ in.	34 in.	20 $\frac{3}{8}$ x 31 $\frac{1}{4}$ in.		
Right-hand		23 $\frac{3}{8}$ in.	20 $\frac{3}{4}$ in.	60 $\frac{3}{4}$ in.	20 $\frac{3}{8}$ x 57 $\frac{3}{8}$ in.		
Under cooling chamber		25 in.	20 $\frac{3}{4}$ in.	22 in.	20 $\frac{3}{8}$ x 19 $\frac{3}{8}$ in.		
Left-hand		23 $\frac{3}{8}$ in.	20 $\frac{3}{4}$ in.	60 $\frac{3}{4}$ in.	20 $\frac{3}{8}$ x 57 $\frac{3}{8}$ in.		

\*Ice racks omitted.





## McCray Model 2603

**E**XTERIOR, front and two ends of birch, finished in Nile Green enamel. Interior is of heavy rust-resisting galvanized iron covered with special white refrigerator enamel. Display compartment as well as the display doors is equipped with two thicknesses of double strength glass with air space between. Walls are approximately 4 inches thick, insulated with 2 inches of pure corkboard sealed with hydrolene. One adjustable metal bar shelf. There is a large decorated opal glass panel in the front. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. Cooling chamber is overhead with door in each end. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
8' 6"	2' 10"	8' 6"	975 lbs.	24.19	132.9	2450 lbs.	<i>Freeman</i>

Compartment	Width	Depth	Height	Door Opening
Cooling chamber	94 in.	17 in.	26 in.	16 $\frac{1}{4}$ x 22 $\frac{1}{8}$ in.
Right-hand	31 $\frac{1}{4}$ in.	26 in.	61 in.	25 $\frac{3}{4}$ x 56 $\frac{3}{8}$ in.
Center	31 $\frac{1}{4}$ in.	26 in.	61 in.	25 $\frac{3}{4}$ x 56 $\frac{3}{8}$ in.
Left-hand	31 $\frac{1}{4}$ in.	26 in.	61 in.	25 $\frac{3}{4}$ x 56 $\frac{3}{8}$ in.



## McCray Model 600

**E**XTERIOR, front and two ends of birch. It is carried in stock in white enamel, mahogany finish and unfinished wood, ready for special stain if necessary. Interior of heavy rust-resisting galvanized iron, covered with special white refrigerator enamel. Display compartment as well as display doors is equipped with two thicknesses of double strength glass with air space between. Walls are approximately 4 inches thick, insulated with 2 inches of pure cork-board sealed with hydrolene. One adjustable metal bar shelf. There is a large bevel plate mirror in the front. Nickel-plated bronze hardware, polished, fasteners of self-closing type. All doors fitted with double gaskets. Cooling chamber is overhead with door in each end. This model may be cooled by ice or mechanical refrigeration of any type, no changes necessary.

Width	Depth	Height	Ice Capacity	Sq. Ft. Shelf Space	Cu. Ft. Capacity	Shipping Weight	Code Word
6'	2' 10"	8' 6"	550 lbs.	16.8	91.59	1900 lbs.	Famous
Compartment			Width	Depth	Height	Door Opening	
*Cooling chamber			65 in.	17 in.	25 in.	16 <sup>5</sup> / <sub>8</sub> x 22 <sup>1</sup> / <sub>4</sub> in.	
Right-hand			32 <sup>3</sup> / <sub>8</sub> in.	26 <sup>3</sup> / <sub>8</sub> in.	58 <sup>1</sup> / <sub>2</sub> in.	25 <sup>3</sup> / <sub>8</sub> x 54 <sup>3</sup> / <sub>8</sub> in.	
Left-hand			32 <sup>3</sup> / <sub>8</sub> in.	26 <sup>3</sup> / <sub>8</sub> in.	58 <sup>1</sup> / <sub>2</sub> in.	25 <sup>3</sup> / <sub>8</sub> x 54 <sup>3</sup> / <sub>8</sub> in.	

\*Ice racks omitted.



